



# JN0-662<sup>Q&As</sup>

Service Provider Routing and Switching - Professional (JNCIP-SP)

## Pass Juniper JN0-662 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-662.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





### QUESTION 1

After committing the following configuration change on your MPLS VPN PE router, all MPLS VPN destinations become unreachable.

```
user@router# show protocols mpls  
traffic-engineering bgp-igp;
```


Which additional configuration solves the issue?

- A.
- B.
- C.
- D.

Correct Answer: C

### QUESTION 2

Click the Exhibit button.

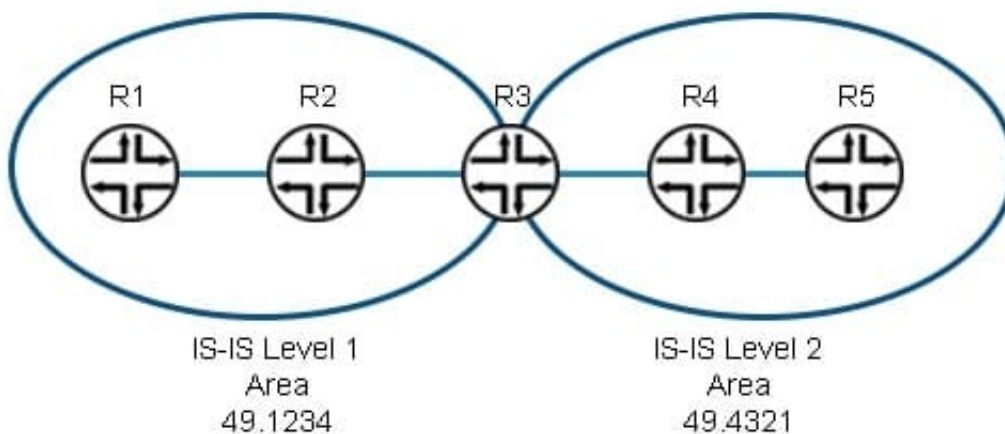

Referring to the topology shown in the exhibit, where will the attached bit be set?

- A. R4's level 1 database
- B. R4's level 2 database
- C. R3's level 1 database
- D. R3's level 2 database

Correct Answer: C



### QUESTION 3

Click the Exhibit button.

```
[edit interfaces]
user@router# show
ge-1/0/0 {
    unit 0 {
        family inet {
            filter {
                input inbound_filter;
                output outbound_filter;
            }
            policer {
                input inbound_policer;
                output outbound_policer;
            }
            address 10.10.100.1/24;
        }
    }
}
```

Referring to the exhibit, in which order will ICMP traffic be processed by the configured filters and policers for interface ge-1/0/0?

- A. input filter, input policer, output policer, output filter
- B. input policer, input filter, output policer, output filter
- C. input filter, input policer, output filter, output policer
- D. input policer, input filter, output filter, output policer

Correct Answer: D

### QUESTION 4

Click the Exhibit button.



```
user@router> show bgp neighbor 10.222.222.3
Peer: 10.222.222.3+62377 AS 65511 Local: 10.222.222.4+179 AS 65511
  Type: Internal      State: Established      Flags: <Sync>
  Last State: OpenConfirm  Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference LocalAddress AddressFamily Rib-group Refresh>
  Address families configured: inet-unicast inet-multicast inet-vpn-multicast inet6-vpn-unicast inet-vpn-
flow 12vpn-signaling
  Local Address: 10.222.222.4 Holdtime: 90 Preference: 170
  Number of flaps: 1
  Last flap event: RecvNotify
  Error: 'Cease' Sent: 0 Recv: 1
  Peer ID: 10.222.222.3 Local ID: 10.222.222.4 Active Holdtime: 90
  Keepalive Interval: 30 Peer index: 1
  BFD: disabled, down
  NLRI for restart configured on peer: inet-unicast inet-multicast inet-vpn-multicast 12vpn inet6-vpn-
unicast inet-vpn-flow
  NLRI advertised by peer: inet-unicast inet-multicast inet-vpn-unicast inet-vpn-multicast 12vpn inet6-
vpn-unicast inet-vpn-flow
  NLRI for this session: inet-unicast inet-multicast inet-vpn-multicast 12vpn inet6-vpn-unicast inet-vpn-
flow
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast inet-multicast inet-vpn-multicast 12vpn inet6-vpn-
unicast inet-vpn-flow
  NLRI of received end-of-rib markers: inet-unicast inet-multicast inet-vpn-multicast 12vpn inet6-vpn-
unicast inet-vpn-flow
  NLRI of all end-of-rib markers sent: inet-unicast inet-multicast inet-vpn-multicast 12vpn inet6-vpn-
unicast inet-vpn-flow
  Peer supports 4 byte AS extension (peer-as 65511)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes: 0
    Received prefixes: 0
    Accepted prefixes: 0
    Suppressed due to damping: 0
    Advertised prefixes: 0
  Table bgp.invpnflow.0
    RIB State: BGP restart is complete
    RIB State: VPN restart is complete
    Send state: not advertising
    Active prefixes: 0
    Received prefixes: 0
    Accepted prefixes: 0
    Suppressed due to damping: 0
```

The exhibit shows a BGP peering session for two PE routers. The BGP session is up, but IPv4 hosts in the Layer 3 VPN that use the BGP session are unable to communicate.

What is the problem?

- A. The BGP peer does not support the add-path feature.
- B. The BGP peer does not support the restarter functionality.
- C. The local BGP router does not support Layer 2 VPN and Layer 3 VPN NLRI address families at the same time.
- D. There is a mismatch in the supported NLRI address families between the BGP peers.

Correct Answer: D

## QUESTION 5



Click the Exhibit button.

```
user@R1# show routing-instances
vpn-a {
    instance-type 12vpn;
    interface ge-0/0/1.512;
    interface ge-0/0/1.513;
    route-distinguisher 192.168.1.1:1;
    vrf-import import-vpn-a;
    vrf-export export-vpn-a;
    protocols {
        12vpn {
            encapsulation-type ethernet-vlan;
            site CE-A {
                site-identifier 1;
                interface ge-0/0/1.512;
                interface ge-0/0/1.513;
            }
        }
    }
}
```

You have configured a BGP-signaled Layer 2 VPN with the configuration shown in the exhibit. Which two statements are true in this situation? (Choose two.)

- A. Remote site 1 is dual-homed.
- B. The local site is site ID 1.
- C. The route-distinguisher is in the wrong format.
- D. Interface ge-0/0/1.512 is connected to the local site

Correct Answer: AB

[Latest JN0-662 Dumps](#)

[JN0-662 PDF Dumps](#)

[JN0-662 Braindumps](#)