



# JN0-663<sup>Q&As</sup>

Service Provider Routing and Switching, Professional (JNCIP-SP)

## Pass Juniper JN0-663 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-663.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





### QUESTION 1


	AS-Path	MED	Local Preference	Origin
ISP-A	100 200 1	50	100	I
ISP-B	3000 1500	50	100	E
ISP-C	5000 4000	50	100	?
ISP-D	1000 7000	50	100	I

You are receiving the same 200.0.0.0/24 BGP route from four different ISPs. Referring to the exhibit, which ISP's route would be selected as active?

- A. ISP-B
- B. ISP-A
- C. ISP-C
- D. ISP-D

Correct Answer: D

### QUESTION 2

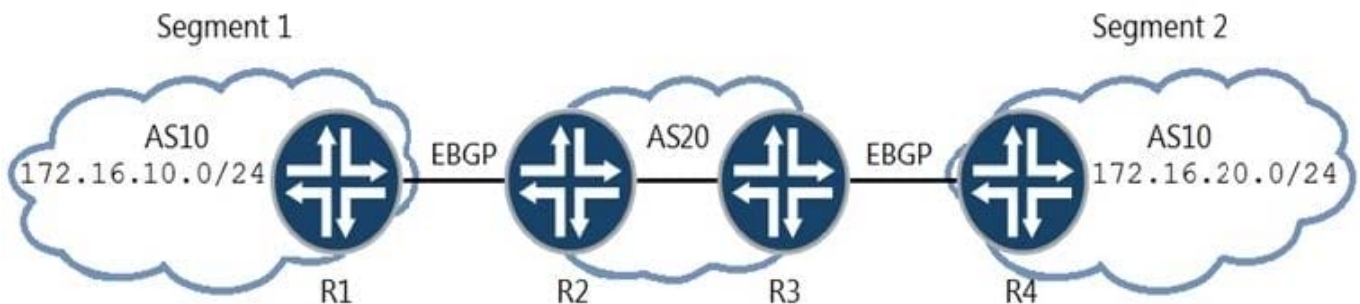

Your network connects two segments of your customer's network as shown in the exhibit. They need to exchange routes between Segment 1 and Segment 2 but both segments use the same AS number.

Which two steps will accomplish this task? (Choose two.)

- A. Configure the routing-options autonomous-system loops 1 parameter on routers R1 and R4.
- B. Configure the BGP group with the advertise-peer-as parameter on routers R2 and R3.
- C. Configure the routing-options autonomous-system loops 1 parameter on routers R2 and R3.
- D. Configure the BGP group with the as-override parameter on routers R1 and R4.

Correct Answer: AB



### QUESTION 3

You are creating a new LDP signaled Layer 2 circuit between three customer sites.

In this scenario, which two statements are correct? (Choose two.)

- A. BGP is used to exchange the virtual circuit labels with other PEs.
- B. You are allowed to tunnel your LDP sessions through RSVP LSPs.
- C. You are not allowed to use any RSVP-signaled LSPs in your core network.
- D. LDP is used to exchange the virtual circuit labels with other PEs.

Correct Answer: BD

---

### QUESTION 4



```
[edit routing-instances CE-1]
user@R1# show
protocols {
    bgp {
        group CE-1 {
            type external;
            peer-as 65555;
            neighbor 10.1.1.100;
        }
    }
}
instance-type vrf;
interface ge-0/0/2.0;
route-distinguisher 65512:1;
vrf-target target:65512:100;

[edit routing-instances CE-2]
user@R2# show
protocols {
    bgp {
        group CE-2 {
            type external;
            peer-as 64444;
            neighbor 10.1.5.100;
        }
    }
}
instance-type vrf;
interface ge-0/0/3.0;
route-distinguisher 65512:1;
vrf-target target:65512:200;
```

Referring to the exhibit, which two statements are true? (Choose two.)


- A. The route-distinguisher configuration allows routes to be shared between CE-1 and CE-2.
- B. The vrf-target configuration stops routes from being shared between CE-1 and CE-2.
- C. The route-distinguisher configuration stops routes from being shared between CE-1 and CE-2.



D. The vrf-target configuration allows routes to be shared between CE-1 and CE-2.

Correct Answer: AB

#### QUESTION 5

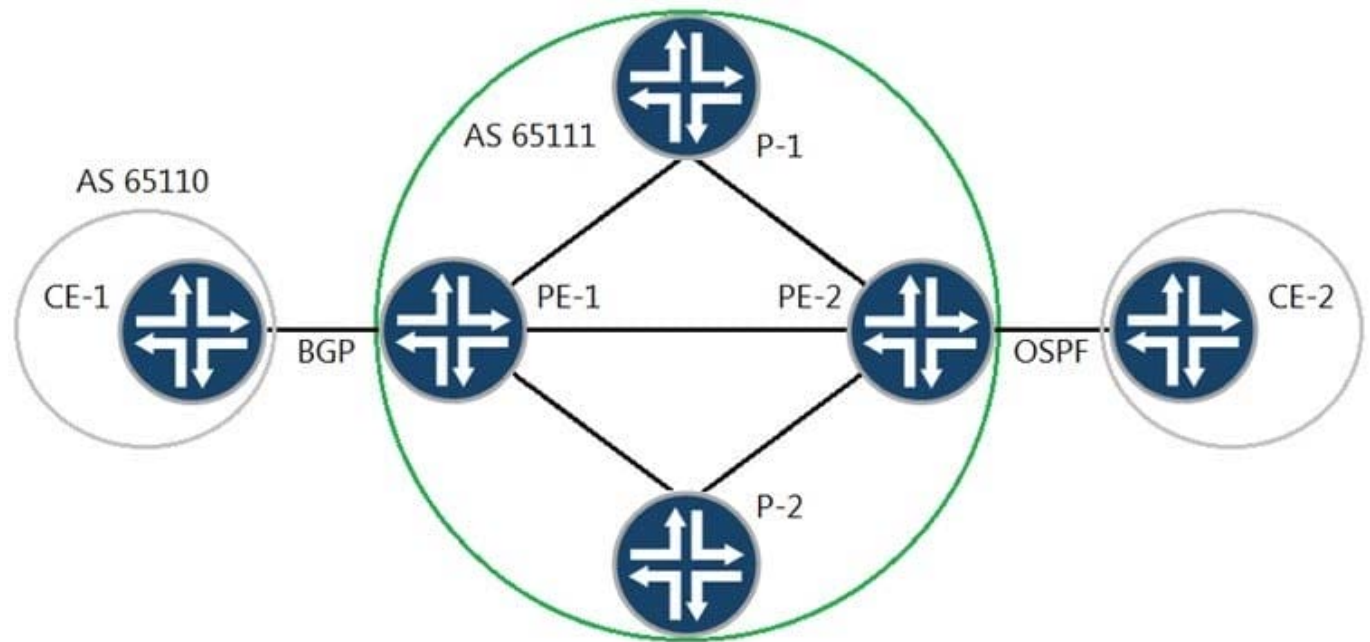

You have a Layer 3 VPN established between PE-1 and PE-2 to allow communication between CE-1 and CE-2. You want to establish communication between CE-1 and CE-2.

Referring to the exhibit, which statement is correct?

- A. You will need a BGP export policy on PE-1 to redistribute the OSPF routes, learned from PE-2, to the CE1 BGP neighbor.
- B. You will need a VRF import policy on PE-2 to advertise the OSPF routes, learned from CE-2, through the Layer 3 VPN.
- C. You will need a VRF export policy on PE-2 to redistribute the OSPF routes, learned from CE-2, through the Layer 3 VPN.
- D. You will need a VRF import policy on PE-1 to receive the OSPF routes, learned from PE-2, through the Layer 3 VPN.

Correct Answer: C

[JN0-663 VCE Dumps](#)

[JN0-663 Practice Test](#)

[JN0-663 Study Guide](#)