



JN0-681^{Q&As}

New Data Center, Professional

Pass Juniper JN0-681 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-681.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

You are asked to design a deployment plan for a large number of QFX Series switches using ZTP. The ZTP deployment plan must ensure all switches are configured with their designated configuration file.

Which DHCP option and suboption combination would be used to accomplish this task?

- A. DHCP option 43 with a suboption of 00
- B. DHCP option 66 with a suboption of 00
- C. DHCP option 66 with a suboption of 01
- D. DHCP option 43 with a suboption of 01

Correct Answer: A

QUESTION 2

Your manager asks you to secure ARP and DHCP traffic across your local Ethernet links.

In this scenario, which technology will accomplish this task?

- A. SSL
- B. a firewall filter
- C. IPsec
- D. MACsec

Correct Answer: D

QUESTION 3

Which EVPN route type prevents BUM traffic from looping back to a multihomed host?

- A. IP prefix route
- B. Ethernet autodiscovery route
- C. Ethernet segment route
- D. inclusive multicast-Ethernet tag route

Correct Answer: B

QUESTION 4



You are asked to enable plug-and-play for future line card switches in an active VCF without making any future Junos configuration changes. You are also required to ensure that all new line cards are automatically upgraded to the correct Junos version without any manual intervention.


In this scenario, which two actions will accomplish this task? (Choose two.)

- A. Ensure that the newly inserted line card's MAC addresses are present in the DHCP configuration for ZTP.
- B. Configure the auto-sw-update parameter on the VCF before inserting new line cards.
- C. Set the Virtual Chassis as pre-provisioned before the line cards are inserted.
- D. Set the Virtual Chassis as auto-provisioned before the line cards are inserted.

Correct Answer: BD

QUESTION 5

The MC-LAG group shown in the exhibit is providing high availability services for the directly connected servers. The backup liveness detection is applied to the ICL-PL link, however, when one of the members rebooted, there was traffic loss for a few seconds.

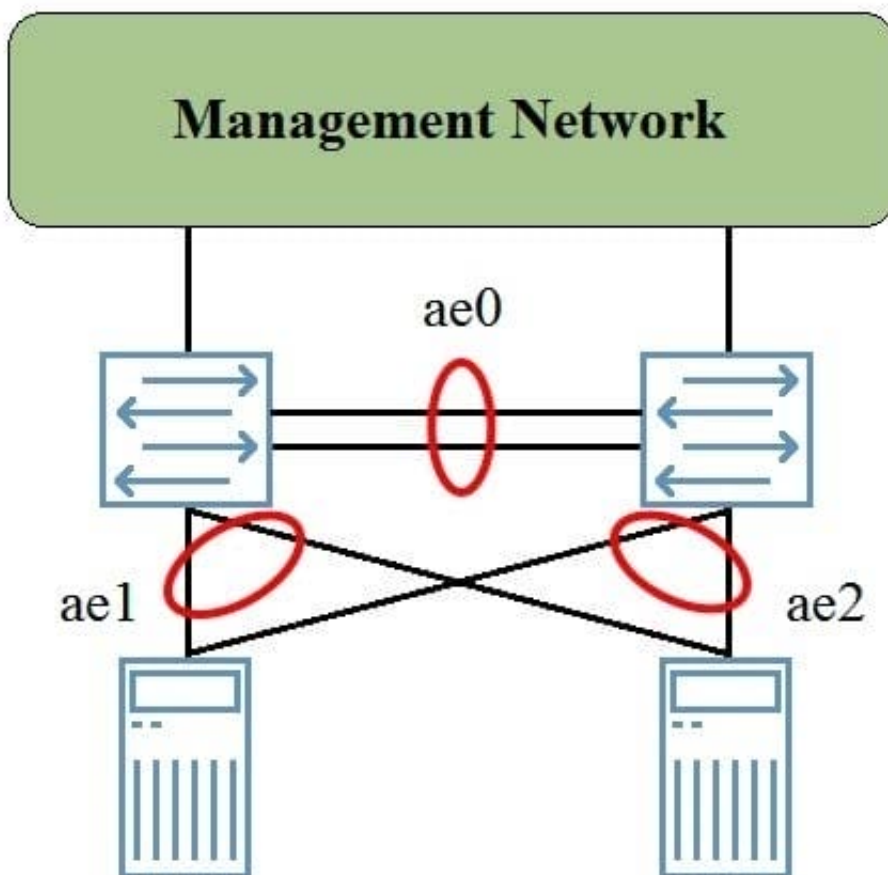



In this scenario, where should you apply the backup liveness detection?

- A. on the ae1 interface
- B. on the ae2 interface
- C. on the management interfaces
- D. on the ae0 interface

Correct Answer: C

[JN0-681 PDF Dumps](#)

[JN0-681 Study Guide](#)

[JN0-681 Exam Questions](#)