



# JN0-682<sup>Q&As</sup>

Data Center Professional (JNCIP-DC)

## Pass Juniper JN0-682 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-682.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





### QUESTION 1

You want to ensure high availability of the Junos devices in your data center. In this scenario, which three features would accomplish this task? (Choose three.)

- A. Multiple Spanning Tree Protocol
- B. Virtual Router Redundancy protocol
- C. graceful Routing Engine switchover
- D. Dual Routing Engineers
- E. Virtual private LAN service

Correct Answer: BCD

---

### QUESTION 2

You are configuring an MX Series router to act as a Layer 3 gateway to route traffic between VXLANs in different data centers across a WAN connection. In this scenario, what must you do to enable this communication?

- A. Configure route reflectors.
- B. Change the UDP port used by the VXLANs.
- C. Configure the IRB interfaces to connect the VXLANs.
- D. Enable PIM on all interfaces.

Correct Answer: C

---

### QUESTION 3

Referring to the exhibit, you want to advertise the IRB routes between both routing instances.



```
Exhibit

[edit routing-instances]
user@spine-1# show
Tenant_A {
  instance-type vrf;
  interface irb.101;
  route-distinguisher 10.1.255.1:1010;
  vrf-target target:65000:101;
}
Tenant_C {
  instance-type vrf;
  interface irb.103;
  route-distinguisher 10.1.255.1:1030;
  vrf-target target:65000:103;
}

[edit policy-options]
user@spine-1# show
policy-statement irb-A {
  term 1 {
```

```
Exhibit

route-distinguisher 10.1.255.1:1030;
vrf-target target:65000:103;
}

[edit policy-options]
user@spine-1# show
policy-statement irb-A {
  term 1 {
    from community comm-VE_VLAN101;
    then accept;
  }
}
policy-statement irb-C {
  term 1 {
    from community comm-VE_VLAN103;
    then accept;
  }
}

community comm-VE_VLAN101 members target:65000:101;
community comm-VE_VLAN103 members target:65000:103;
```

Which two configuration parameters would be applied to accomplish this task? (Choose two.)


- A. Apply policy irb-A under instance Tenant\_c and apply policy irb-c under instance Tenant\_A as import policies.
- B. Configure auto-export under both routing instances.
- C. Configure vrf-table-label under both routing instances.
- D. Apply policy irb-A under instance Tenant A and apply policy irb-c under instance Tenant\_c as export policies.

Correct Answer: AC

#### QUESTION 4



Referring to the exhibit, which statement is correct?

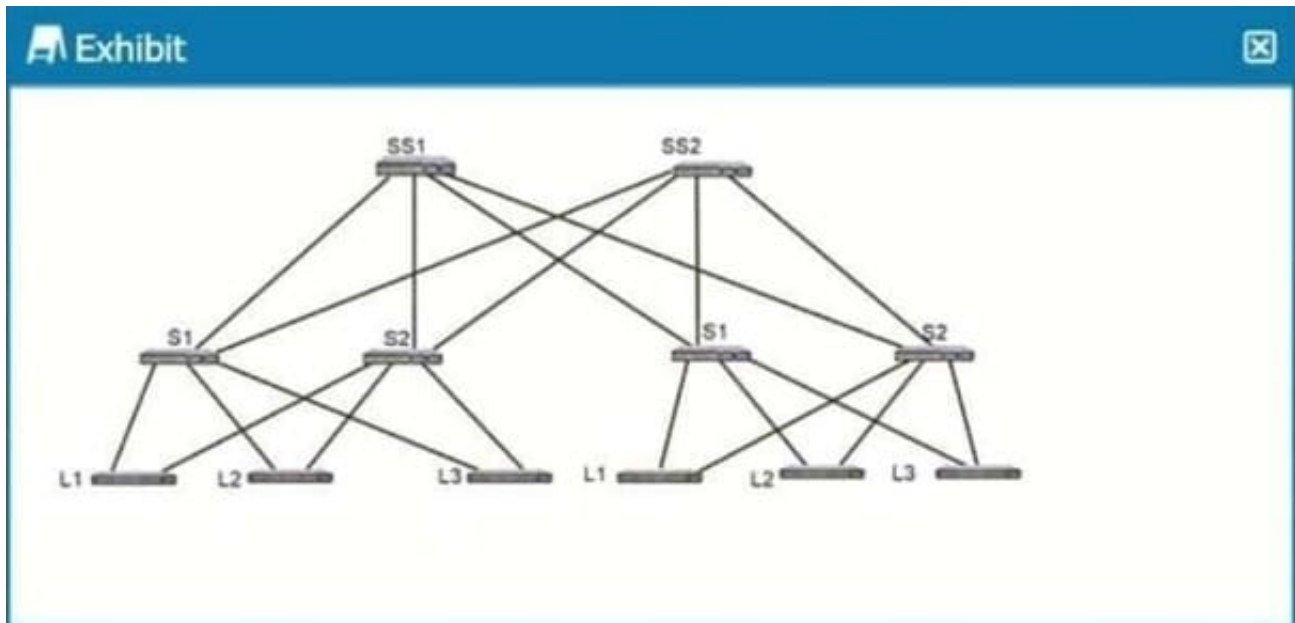


- A. The exhibit shows a 5-stage IP fabric architecture.
- B. The exhibit shows a collapsed fabric architecture.
- C. The exhibit does not represent a valid fabric architecture.
- D. The exhibit shows a 3-stage IP fabric architecture.

Correct Answer: A

## QUESTION 5

You are logged in to Leaf 1. When examining the routing table, you notice that you have no routes from Leaf 2.

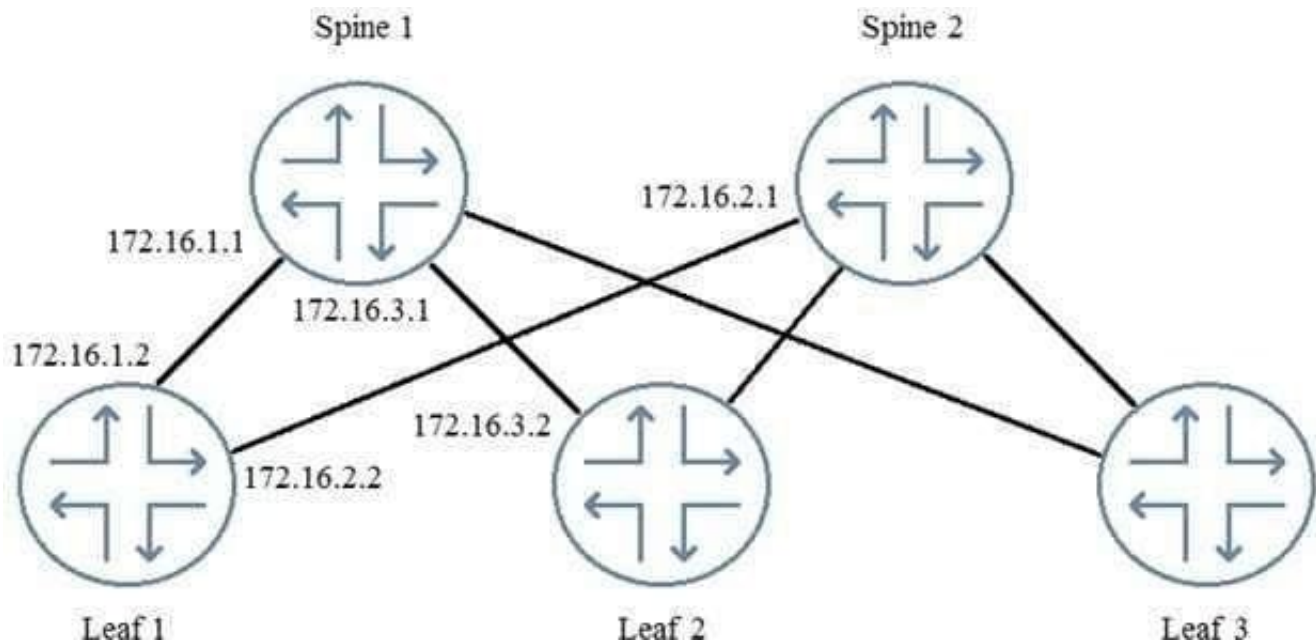

Referring to the exhibit, which two commands would you use to troubleshoot the problem? (Choose two.)

- A. From Leaf 2, issue the show route advertising-protocol bgp 172.16.1.2 command.
- B. From Spine 1, issue the show route advertising-protocol bgp 172.16.1.1 command.
- C. From Spine 1, issue the show route advertising-protocol bgp 172.16.1.2 command.
- D. From Leaf 1, issue the show route receive-protocol bgp 172.16.1.1 command.

Correct Answer: CD

[JN0-682 PDF Dumps](#)

[JN0-682 VCE Dumps](#)

[JN0-682 Braindumps](#)