



JN0-682^{Q&As}

Data Center Professional (JNCIP-DC)

Pass Juniper JN0-682 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-682.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

You are troubleshooting an L3VPN that is part of an EVPN/MPLS DCI. You notice that the EVPN overlay BGP session toward 10.29.50.4 is unable to establish.

```
VPN.inet.0: 15 destinations, 16 routes (15 active,  
0 holddown, 1 hidden)  
  10.29.50.4/32 (2 entries, 1 announced)  
    Import Accepted  
    Route Distinguisher: 65000:12345  
    VPN Label: 16  
    Nexthop: 192.168.5.5  
    MED: 3  
    Localpref: 100  
    AS path: I  
    Communities: target:65000:12345 rte-  
type:0.0.0.0:1:0
```

Why is the BGP session failing to establish?

- A. The route-distinguisher value on the local PE is incorrect
- B. There is no route for 192.168.5.5 an VPN net 0.
- C. There is no route for 192.168.5.5. in inet 3.
- D. The vrf-table label value is not configured in the remote PE.

Correct Answer: C

QUESTION 2

You are deploying a VXLAN using signaling overlay network in your new data center. You are able to establish your MP BGP peering session and see your EVPN routes, but traffic will not traverse the VXLAN using signaling overlay network.

What is a solution to this problem?


- A. Enable the mtu-discovery feature on the MP peering sessions between VXLAN ANs EVPN signaling peers.
- B. Increase the protocol MTU on all devices participating in VXLAN using EVPN signaling
- C. Increase the MTU on the logical VTEP source interface of all devices participating in VXLAN using EVPN signaling.
- D. Increase the physical MTU on all ports on all devices participating in VXLAN using EVPN signaling.

Correct Answer: D



QUESTION 3

In the exhibit, VM1 is part of the same VXLAN segment as VM3.

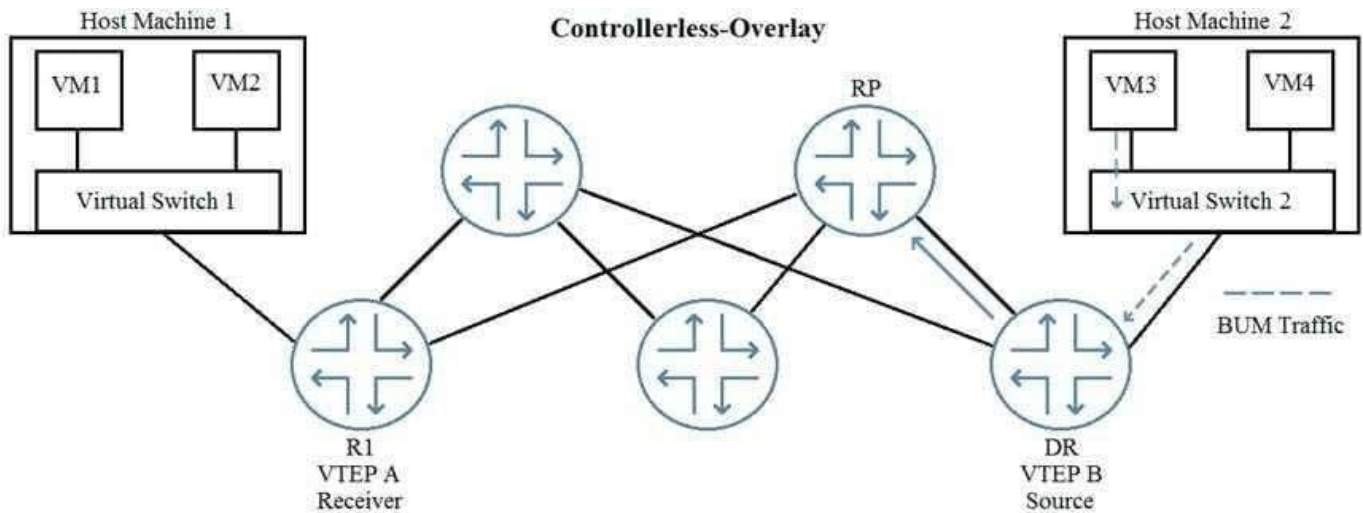


Which type of message will VTEP B initially send to the RP so that VM3 can communicate with VM1?

- A. PIM join
- B. IGMP Join (*, G)
- C. IGMP Join (S,G)
- D. PIM register message

Correct Answer: D

QUESTION 4

Referring to the exhibit, not all routes are being exchanged by EBGp peers.

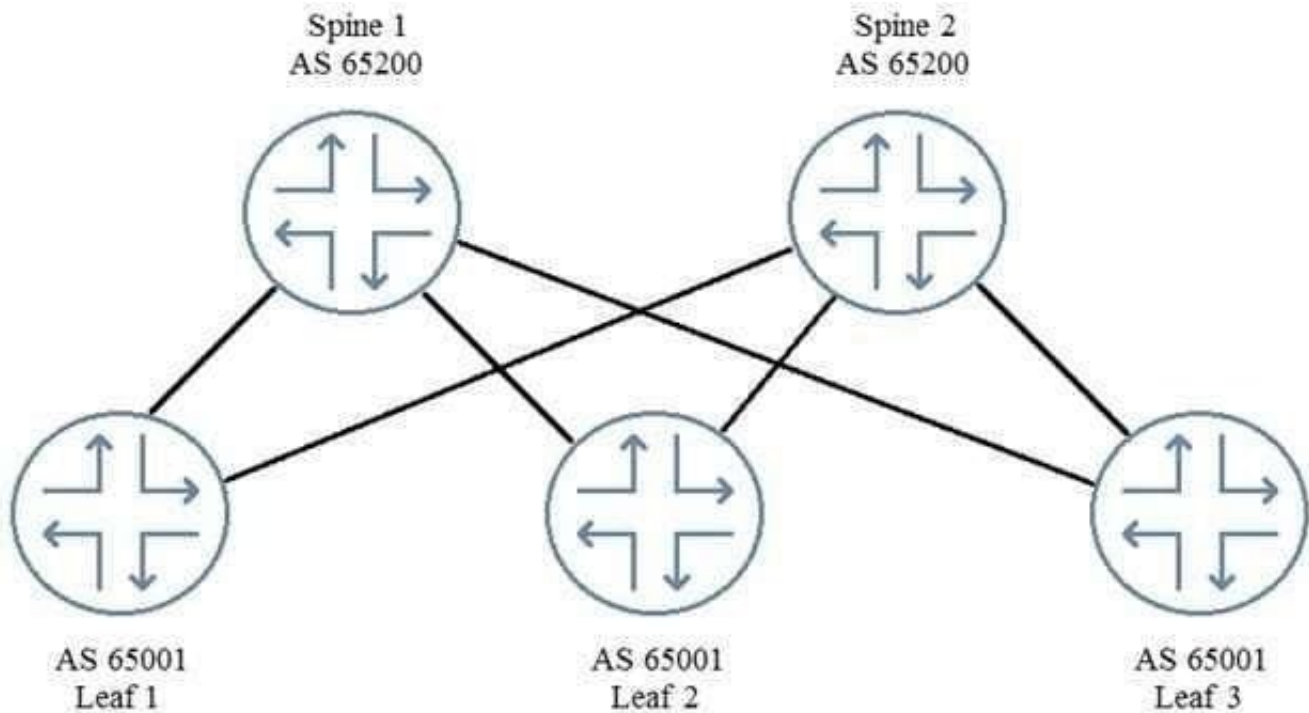

In this scenario, which BGP parameter would solve this problem?

- A. mulcihop
- B. mulcipach
- C. mulcipach multiple-as
- D. as-override

Correct Answer: D

QUESTION 5

When using EBGp as the underlay protocol for your IP fabric architecture, which two statements are true? (Choose two.)

- A. Spine nodes peer to both leaf and spine nodes
- B. Leaf nodes only peer to spine nodes
- C. Leaf nodes peer to both spine and leaf nodes
- D. Spine nodes only peer to leaf nodes

Correct Answer: BD