



JN0-740^{Q&As}

ACX, Specialist (JNCIS-ACX)

Pass Juniper JN0-740 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-740.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Your security policy requires you to block DNS zone transfers (TCP port 53) while permitting DNS queries (UDP port 53).

Which step must you complete before creating the policy?

- A. Modify the predefined DNS service to remove TCP port 53.
- B. Modify the predefined DNS application to remove TCP port 53.
- C. Create a custom service using UDP port 53 as the source port.
- D. Create a custom service using TCP port 53 as the destination port.

Correct Answer: D

QUESTION 2

What is IP address shifting using a DIP?

- A. When specific addresses in the DIP pool require port translation and others do not.
- B. When a one-to-one mapping of a range of private address to a range of public address is needed.
- C. When a DIP has run out of addresses in the DIP pool and must "shift" to addresses from another pool instead.
- D. When a DIP pool is "shifted" to use an address pool in the network range of the secondary address instead of the primary address.

Correct Answer: B

QUESTION 3

Which ScreenOS CLI command would be used to verify WebAuth authentication?

- A. get webauth
- B. get auth users
- C. get auth table
- D. get webauth users

Correct Answer: C

QUESTION 4

By default, what type of NAT is performed when you implement interface-based NAT?




- A. Src-IP address translation
- B. Dst-IP address translation
- C. Src-IP and port address translation
- D. Dst-IP and port address translation

Correct Answer: C

QUESTION 5

-- Exhibit -

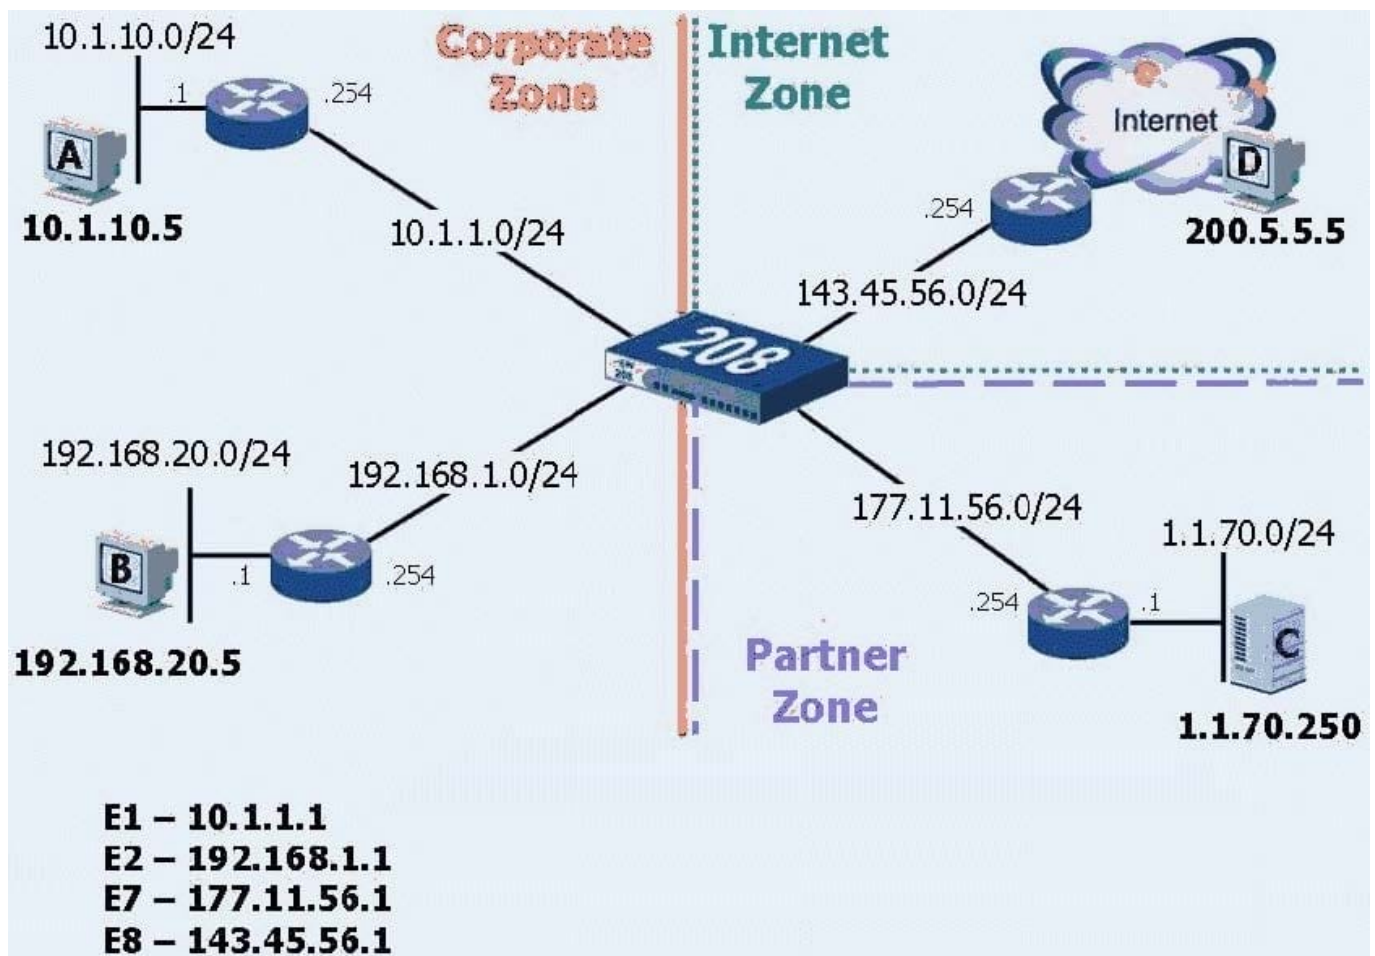

-- Exhibit -Click the Exhibit button to view the exhibit.

Review the exhibit. What would be the best routing command to allow host A to communicate with host B?

(Assume a route from the 208 to Host A's subnet already exists.)

- A. set route 0.0.0.0/0 int e2 gateway 192.168.1.254
- B. set route 192.168.20.0 interface e1 gateway 192.168.1.254



C. configure route 192.168.20.0/24 gateway 192.168.1.254 int e2

D. set route 192.168.20.0/24 interface e2 gateway 192.168.1.254

Correct Answer: D

[JN0-740 PDF Dumps](#)

[JN0-740 Practice Test](#)

[JN0-740 Study Guide](#)