



NS0-161^{Q&As}

NetApp Certified Data Administrator, ONTAP

Pass NetApp NS0-161 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/ns0-161.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

You are asked to create a new SVM to serve SMB data using Active Directory authentication. Which two requirements must be satisfied prior to serving data? (Choose two.)

- A. DNS must be enabled and configured correctly.
- B. The CIFS license must be installed on the storage system.
- C. An intercluster LIF must be created for serving SMB data.
- D. An administrative user must be created for the SMB SVM.

Correct Answer: AC

QUESTION 2

Your company requires that all data must be encrypted in flight to prevent data from falling into the wrong hands.


What are two ways to accomplish this task? (Choose two.)

- A. Ensure that SnapMirror compression is enabled in all SnapMirror relationships.
- B. Modify your cluster peering relationships to support cluster peering encryption.
- C. Enable Multi-Factor Authentication (MFA) for your SnapMirror relationships.
- D. Ensure that all intercluster replication traffic is done through a VPN tunnel.

Correct Answer: BC

QUESTION 3

Click the Exhibit button.

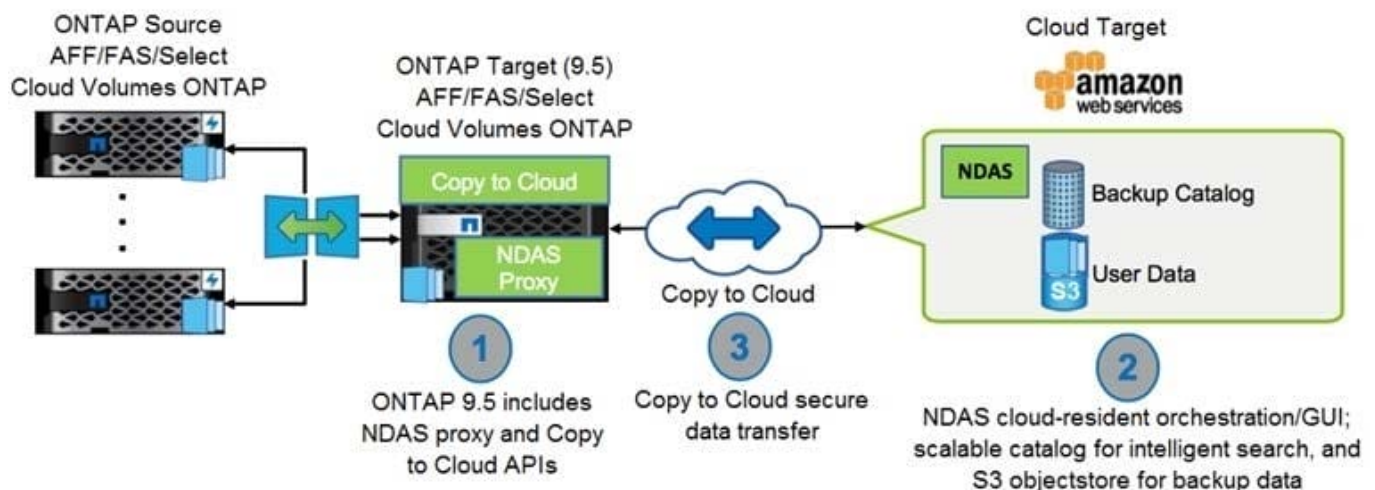



Referring to the exhibit, which LIF role is required to copy to cloud with this NetApp Data Availability Services (NDAS) solution? (Choose the best answer.)

- A. node management
- B. cluster
- C. data
- D. intercluster

Correct Answer: D

QUESTION 4

You are asked to investigate possible solutions for increasing the performance of a read-intensive, NFSv3 workload in your FAS environment.

Which two NetApp technologies would satisfy the requirement? (Choose two.)

- A. Flash Pool
- B. FabricPool
- C. FlexCache
- D. FlexVol

Correct Answer: CD

Reference: <https://www.netapp.com/media/10720-tr-4067.pdf>

QUESTION 5

Click the Exhibit button.



```
cluster1::> qos adaptive-policy-group show -policy-group adaptive_qos
```

```
Name: adaptive_qos
Vserver: svm1
Uuid: 09ab72bc-3653-11ea-9e81-0050569dce56
ID: 3782
Expected IOPS: 2048 IOPS/TB
Peak IOPS: 4096 IOPS/TB
Absolute Minimum IOPS: 500 IOPS
Expected IOPS Allocation: used-space
Peak IOPS Allocation: allocated-space
Block Size: ANY
Number of Workloads: 0
```

```
cluster1::> vol show -volume vol01 -fields qos-adaptive-policy-group, size, used
vserver    volume    size      used      qos-adaptive-policy-group
-----
svm1       vol01     2000GB    500GB     adaptive_qos
```

You have an ONTAP 9.7 cluster. You increased the size of the volume to 3 TB, but the IOPS did not increase as expected.

What are the expected IOPS for the volume after the change? (Choose the best answer)

- A. 2048
- B. 6144
- C. 1024
- D. 4096

Correct Answer: C

Reference: https://kb.netapp.com/Advice_and_Troubleshooting/Data_Storage_Software/ONTAP_OS/What_is_Adaptive_QoS_and_how_does_it_work%3F

[NS0-161 PDF Dumps](#)

[NS0-161 VCE Dumps](#)

[NS0-161 Practice Test](#)