



# NS0-175<sup>Q&As</sup>

Cisco and NetApp FlexPod Design Specialist

## Pass NetApp NS0-175 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/ns0-175.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

A customer wants to refresh their FlexPod solution by moving from 10 Gbps to 40 Gbps networking. They use FCoE to boot from SAN.

In this scenario, which statement is true?

- A. FCoE is supported for 32 Gbps adapters
- B. FCoE is supported for 25 Gbps adapters
- C. FCoE is supported for 40 Gbps adapters
- D. FCoE is supported on only 10 Gbps unified adapters

Correct Answer: C

---

### QUESTION 2

A customer plans to decommission a Cisco UCS B-Series server, as part of this action, the customer disassociates the service profile from the currently assigned server.

Which action is performed by UCS Manager in this scenario?

- A. It reboots the primary Fabric Interconnect immediately
- B. It recalculates the power allotment for each blade server within the chassis
- C. It reboots the secondary Fabric Interconnect immediately
- D. It powers down the server


Correct Answer: A

Reference: [https://www.cisco.com/c/en/us/td/docs/unified\\_computing/ucs/ts/faults/reference/3-1/UCSFaultsErrorsRef\\_3-1/UCS\\_SEMs\\_3-1.html](https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/ts/faults/reference/3-1/UCSFaultsErrorsRef_3-1/UCS_SEMs_3-1.html)

---

### QUESTION 3

Click the Exhibit button.

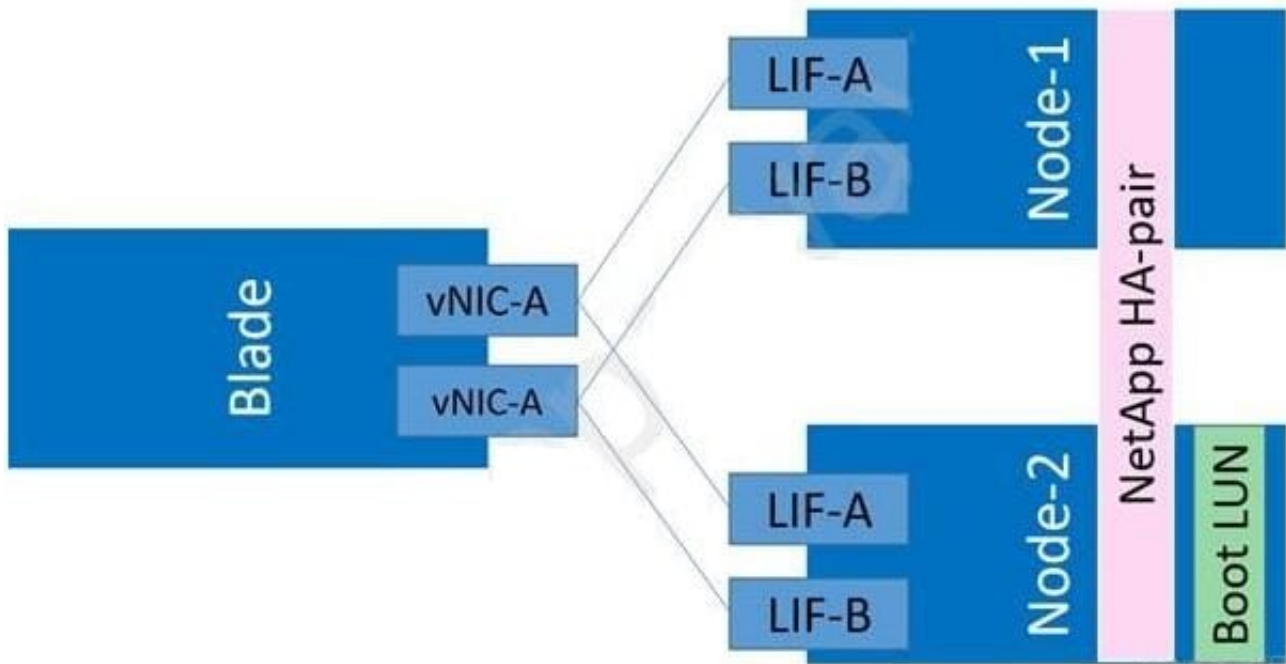

You are building a new FlexPod system booting from SAN.

Referring to the exhibit, how many paths will there be to the target LUN?

- A. 1
- B. 2
- C. 8
- D. 4

Correct Answer: D

#### QUESTION 4

You are sizing a FlexPod Virtual Desktop solution for a customer with 500 virtual desktops in a shared Remote Desktop Services (RDS) topology.

In this scenario, which Cisco best practice should you use?

- A. You should avoid placing more than 20 users per physical host
- B. You should avoid over-committing physical CPU resources for virtual machines
- C. You should avoid changing the virtual host disk queue depth
- D. You should avoid multiple vCPUs per individual virtual machine

Correct Answer: B



Reference: [https://www.vmware.com/content/dam/digitalmarketing/vmware/en/pdf/techpaper/View51\\_on\\_FlexPod\\_Design\\_Guide.pdf](https://www.vmware.com/content/dam/digitalmarketing/vmware/en/pdf/techpaper/View51_on_FlexPod_Design_Guide.pdf)

---

### QUESTION 5

A customer wants to replace their Cisco UCS 6248UP with the current Cisco UCS 6454. They are currently using six 16 Gbit uplinks per Fabric Interconnect for FC and do not want to change the speed and number of ports used.

In this scenario, what is the minimum number of unified ports that must be configured for FC for a comparable configuration?

- A. 8
- B. 6
- C. 16
- D. 12

Correct Answer: A

Reference: [https://www.cisco.com/c/en/us/td/docs/unified\\_computing/ucs/ucs-manager/GUI-User-Guides/Network-Mgmt/4-0/b\\_UCSM\\_Network\\_Mgmt\\_Guide\\_4\\_0/b\\_UCSM\\_Network\\_Mgmt\\_Guide\\_4\\_0\\_chapter\\_0100.html](https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/ucs-manager/GUI-User-Guides/Network-Mgmt/4-0/b_UCSM_Network_Mgmt_Guide_4_0/b_UCSM_Network_Mgmt_Guide_4_0_chapter_0100.html)

[NS0-175 Practice Test](#)

[NS0-175 Study Guide](#)

[NS0-175 Braindumps](#)