



NS0-181^{Q&As}

NetApp Certified Storage Installation Engineer - ONTAP 9.1

Pass NetApp NS0-181 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/ns0-181.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

You are adding new controllers to an existing cluster. As part of the upgrade process, you have updated the BES-53248 cluster switches. In this scenario. Which two commands would you use to verify a healthy cluster after the upgrade? (Choose two.)

- A. network port show -ipspace Cluster
- B. network interface show -vserver Cluster
- C. network device-discovery show -protocol cdp
- D. network interface show -vserver Cluster -fields auto-revert

Correct Answer: AB

Reference: <https://docs.netapp.com/platstor/index.jsp?topic=%2Fcom.netapp.doc.hw-sw-ix8-setup%2FGUID-340F5F50-FFDA-4B5C-A151-007CF9D6063B.html>

QUESTION 2

After a system panic, the NetApp Support team advises you to run the sldiag command. Which two actions must be performed before you use this command? (Choose two.)


- A. At the LOADER prompt, type boot_maintenance.
- B. At the storage system prompt, type halt.
- C. At the LOADER prompt, type boot_diags.
- D. At the storage system prompt, type boot_maintenance.

Correct Answer: BC

Reference: <https://docs.netapp.com/platstor/index.jsp?topic=%2Fcom.netapp.doc.hw-plat-diag%2FGUID-B944DDDB-FA1D-4306-8157-2DF02613CA39.html>

QUESTION 3

Click the Exhibit button.

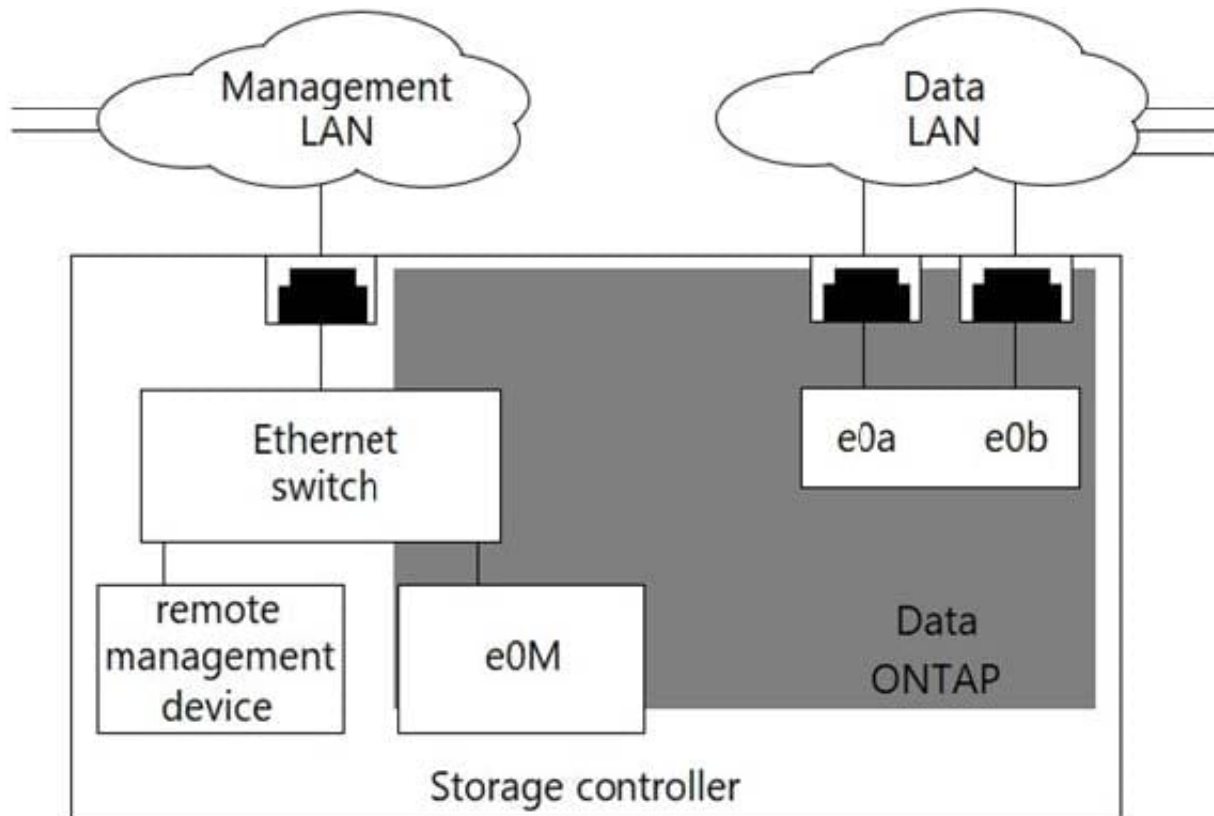

You are installing a new FAS cluster. The management network must be on tagged VLAN 11 for remote administration by a service provider. Referring to the exhibit, which two ports will allow service provider access to both cluster and node management LIFs? (Choose two.)

- A. e0M
- B. e0b-11
- C. e0a-11
- D. e0M-11

Correct Answer: AD

QUESTION 4

What is the default shelf ID for disk shelves with IOM12 modules?

- A. 12
- B. 01
- C. 10
- D. 00

Correct Answer: D



Reference: <https://docs.netapp.com/platstor/index.jsp?topic=%2Fcom.netapp.doc.hw-ds-sas3-icg%2FGUID-F6882D15-2C68-40FC-AAA7-06B227B92377.html>

QUESTION 5

What are two ways to identify an AFF All SAN Array system? (Choose two.)

- A. View the ONTAP System Manager system nodes.
- B. View the ONTAP System Manager cluster settings.
- C. Use the cluster image show CLI command.
- D. Use the san config show CLI command.

Correct Answer: AD

Ways to identify an ASA system You can identify an ASA system using ONTAP System Manager or using the ONTAP command line interface (CLI). From the ONTAP System Manager dashboard, you can click on the system nodes. The personality type is displayed as "ASA" for ASA systems. From the CLI, you can use san config show command. The ASA value returns as true for ASA systems

[NS0-181 Practice Test](#)

[NS0-181 Exam Questions](#)

[NS0-181 Braindumps](#)