



# NS0-184<sup>Q&As</sup>

NetApp Certified Storage Installation Engineer, ONTAP

## Pass NetApp NS0-184 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/ns0-184.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





### QUESTION 1

You are installing a new FAS2750 cluster with 24 HDDs for a customer to run a NAS workload. The customer requests that the HA pair have only a single aggregate that is located on Node 1. Maximum capacity is required.

Which action must be performed to ensure that the customer's requests are satisfied?

- A. Perform a takeover of Node 2 to ensure that it does not run.
- B. Assign all data LIFs to Node 1.
- C. Assign all the partitioned disks from Node 2 to Node 1, and create a single aggregate.
- D. Assign all the data partitions from Node 2 to Node 1, and create a single aggregate.

Correct Answer: B

---

### QUESTION 2

You have installed a new 2-node FAS9000 cluster with two external shelves. You want to make sure that each node has two paths to each disk in the shelves.

How do you verify your configuration?


- A. Use the storage show disk -p command.
- B. Use the storage disk option show command.
- C. Use the disk show -fields initiator command.
- D. Use the sysconfig command.

Correct Answer: C

---

### QUESTION 3

Click the Exhibit button.

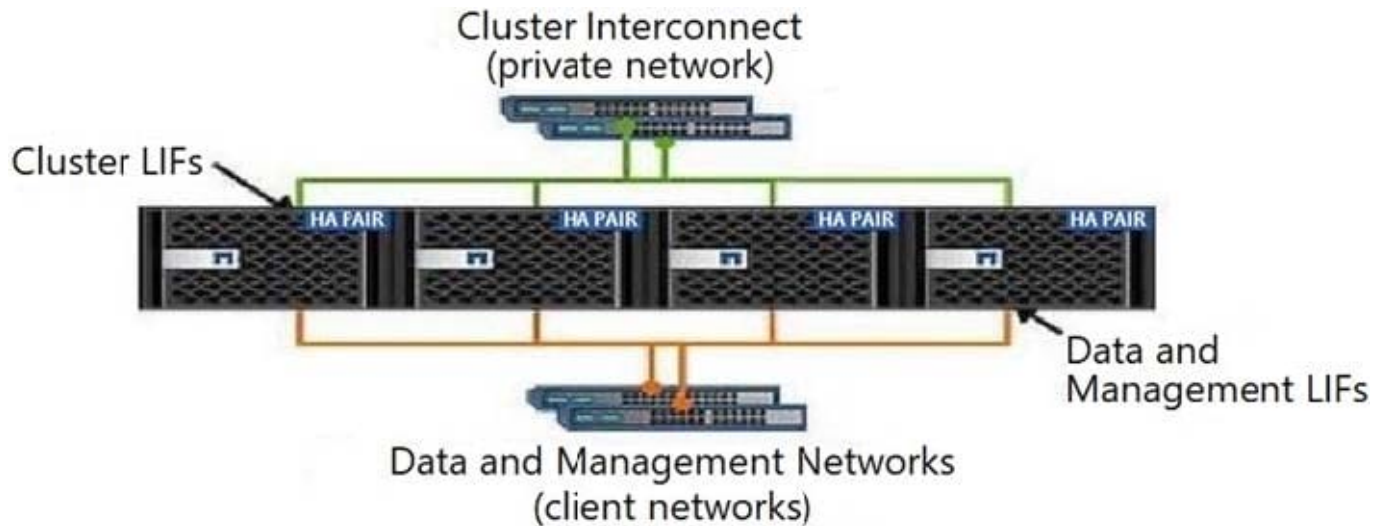

As shown in the exhibit, you have an 8-node ONTAP 9.7 cluster. You are asked to set up a SnapMirror volume relationship between node-1 and node-8 in the same cluster.

In this scenario, which two network components are used by the SnapMirror volume? (Choose two.)

- A. private network
- B. cluster LIFs
- C. client network
- D. management LIFs

Correct Answer: AB

#### QUESTION 4

While installing a new AFF A400 HA pair, you are unable to add an NTP server from another subnet. You are able to ping the NTP server from the new cluster.

In this scenario, what are two causes of this problem? (Choose two.)

- A. The admin SVM has the wrong gateway.
- B. A firewall is blocking port 123.
- C. The time skew is too great.
- D. The cluster management LIF needs to be in a different IPspace.

Correct Answer: AD

#### QUESTION 5

You completed an ONTAP cluster deployment as a reseller engineer. During the knowledge transfer process to the



customer, they ask for proof that the array has correct multi-path HA cabling deployed and that the array is error free.

Which documentation output would you present to the customer to satisfy this requirement?

- A. Active IQ Unified Manager output
- B. NetAppDocs output
- C. Config Advisor output
- D. Active IQ OneCollect output

Correct Answer: C

Reference: <https://docs.netapp.com/platstor/topic/com.netapp.doc.hw-controller-add/GUID-64A513391F03-451C-B062-9F97E772817E.html>

[NS0-184 PDF Dumps](#)

[NS0-184 Practice Test](#)

[NS0-184 Study Guide](#)