



NS0-509^{Q&As}

NetApp Certified Implementation Engineer - SAN - ONTAP

Pass NetApp NS0-509 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/ns0-509.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1


You want to ensure maximum performance of iSCSI LUNs on an AFF A220. In this scenario, which two actions will accomplish this task? (Choose two.)

- A. Disable flow control.
- B. Configure virtual LAN (VLAN).
- C. Enable flow control.
- D. Enable jumbo frames.

Correct Answer: CD

QUESTION 2

Exhibit.

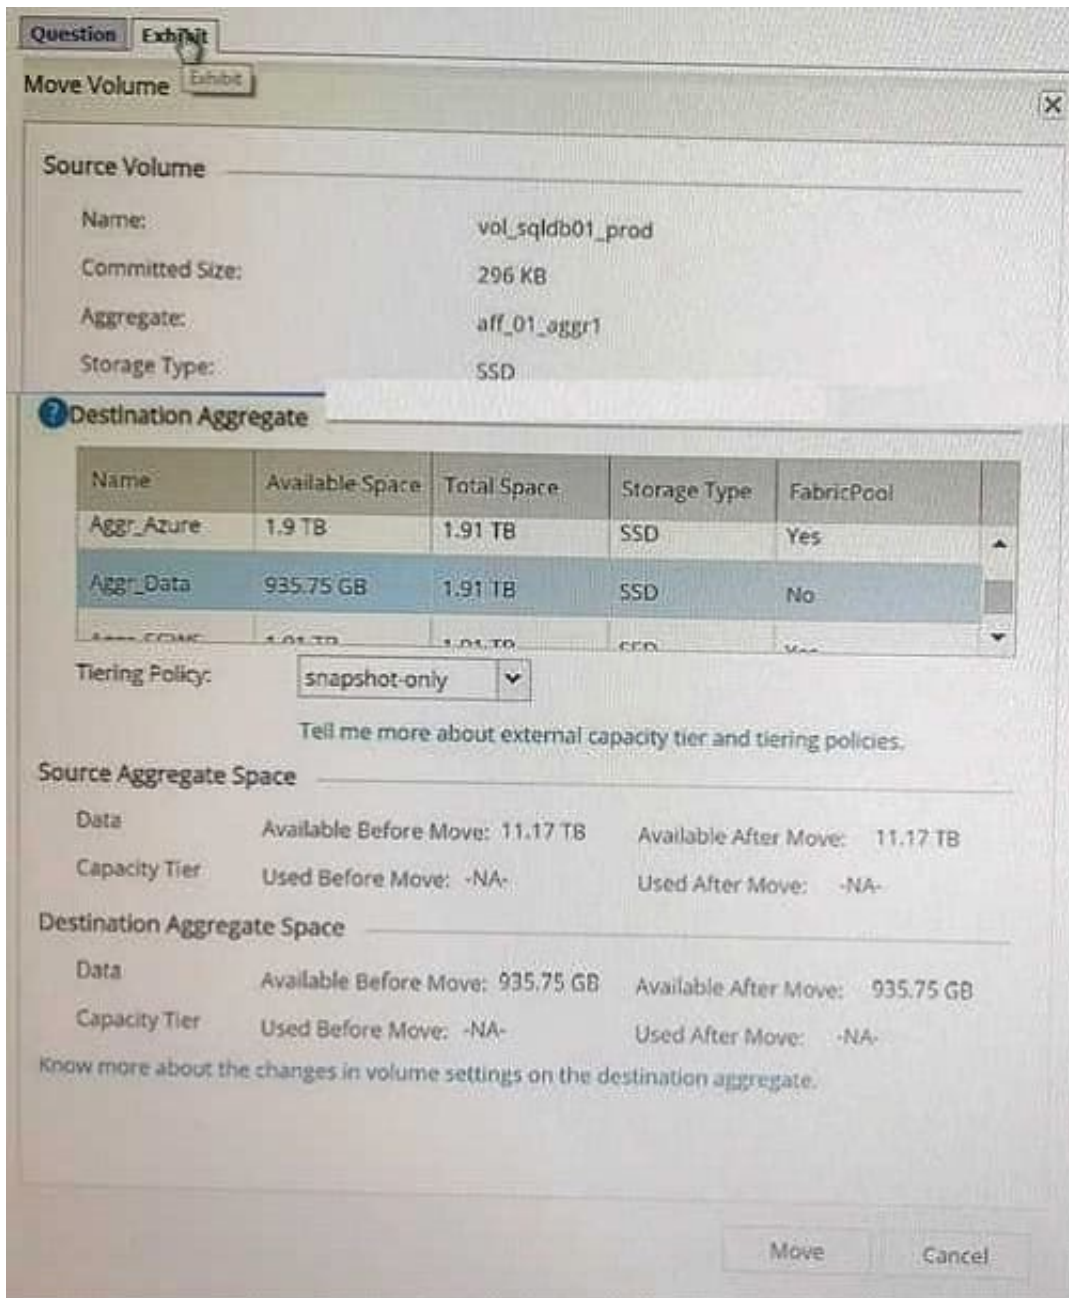

You are moving volumes between aggregate aft_01_aggr1 and the aggregate Aggr_Data shown in the exhibit.

How much space will be moved?

- A. 11.17 TB
- B. 935.75 GB
- C. 296 KB
- D. 1.91 TB

Correct Answer: C



QUESTION 3

You are setting up FC ports and must configure the speeds for both the SAN and the host ports. In this scenario, which statement is correct?

- A. Set the target port speed higher than the switch port speed.
- B. Set the target port speed to auto-negotiation.
- C. Set the target port speed to match the switch port speed.
- D. Set the target port speed lower than the switch port speed.

Correct Answer: B

QUESTION 4

Click the Exhibit button.



You are implementing an ONTAP 9.5 AFF A300 SAN cluster with the NVMe, FC, and FCoE protocols.


Referring to the exhibit, which three protocols and physical port pairs are supported? (Choose three.)

- A. NVMe on ports 2a/2b
- B. FC on ports 2a/2b
- C. NVMe on ports 0e/0f
- D. FCoE on ports 0e/0f
- E. FC on ports 0e/0f

Correct Answer: BCD

QUESTION 5

Click the Exhibit button.

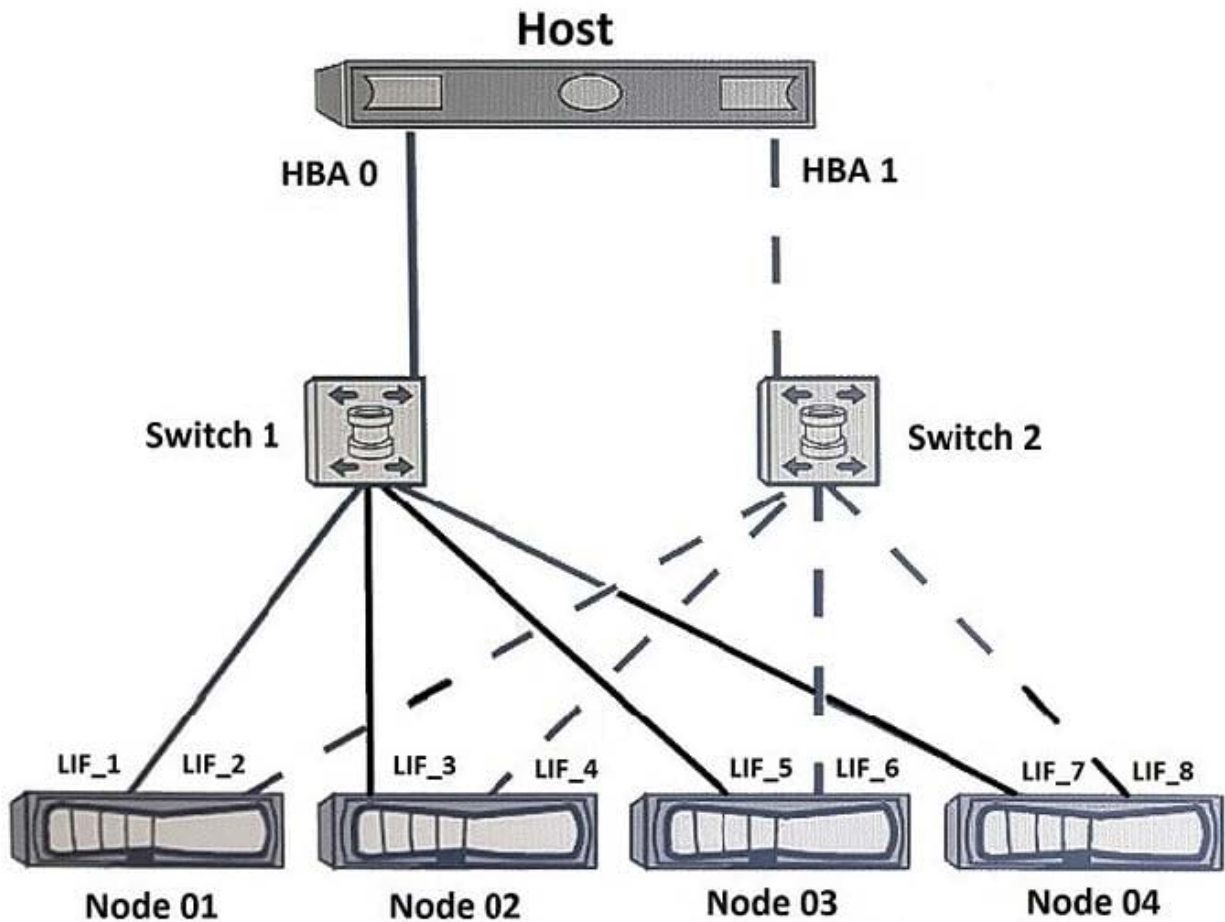

You configured a SAN host with a 4-node ONTAP 9.5 cluster that uses default settings. All paths are available from the host to the four nodes. You have a requirement to see only two paths to each LUN. One path is optimized and the other is non-optimized.

In this scenario, which NetApp SAN feature supports this requirement?

- A. portsets
- B. SLM
- C. VLANs
- D. igroups

Correct Answer: C