



NSE7_OTS-6.4^{Q&As}

Fortinet NSE 7 - OT Security 6.4

Pass Fortinet NSE7_OTS-6.4 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.geekcert.com/nse7_ots-6-4.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Fortinet Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

You are investigating a series of incidents that occurred in the OT network over past 24 hours in FortiSIEM.

Which three FortiSIEM options can you use to investigate these incidents? (Choose three.)

- A. Security
- B. IPS
- C. List
- D. Risk
- E. Overview

Correct Answer: CDE

QUESTION 2

Refer to the exhibit.

	Name	Type	IP/Netmask	VLAN ID
Physical Interface 14				
	port1	Physical Interface	10.200.1.1/255.255.255.0	
	port1-vlan10	VLAN	10.1.10.1/255.255.255.0	10
	port1-vlan1	VLAN	10.200.5.1/255.255.255.0	1
	port10	Physical Interface	10.0.11.1/255.255.255.0	
	port2	Physical Interface	10.200.2.1/255.255.255.0	
	port2-vlan10	VLAN	10.0.10.1/255.255.255.0	10
	port2-vlan1	VLAN	10.0.5.1/255.255.255.0	1



Which statement about the interfaces shown in the exhibit is true?

- A. port2, port2-vlan10, and port2-vlan1 are part of the software switch interface.
- B. The VLAN ID of port1-vlan1 can be changed to the VLAN ID 10.
- C. port1-vlan10 and port2-vlan10 are part of the same broadcast domain
- D. port1, port1-vlan10, and port1-vlan1 are in different broadcast domains

Correct Answer: D

QUESTION 3


As an OT administrator, it is important to understand how industrial protocols work in an OT network. Which communication method is used by the Modbus protocol?

- A. It uses OSI Layer 2 and the primary device sends data based on request from secondary device.
- B. It uses OSI Layer 2 and both the primary/secondary devices always send data during the communication.
- C. It uses OSI Layer 2 and both the primary/secondary devices send data based on a matching token ring.
- D. It uses OSI Layer 2 and the secondary device sends data based on request from primary device.

Correct Answer: D

QUESTION 4

Refer to the exhibit, which shows a non-protected OT environment.

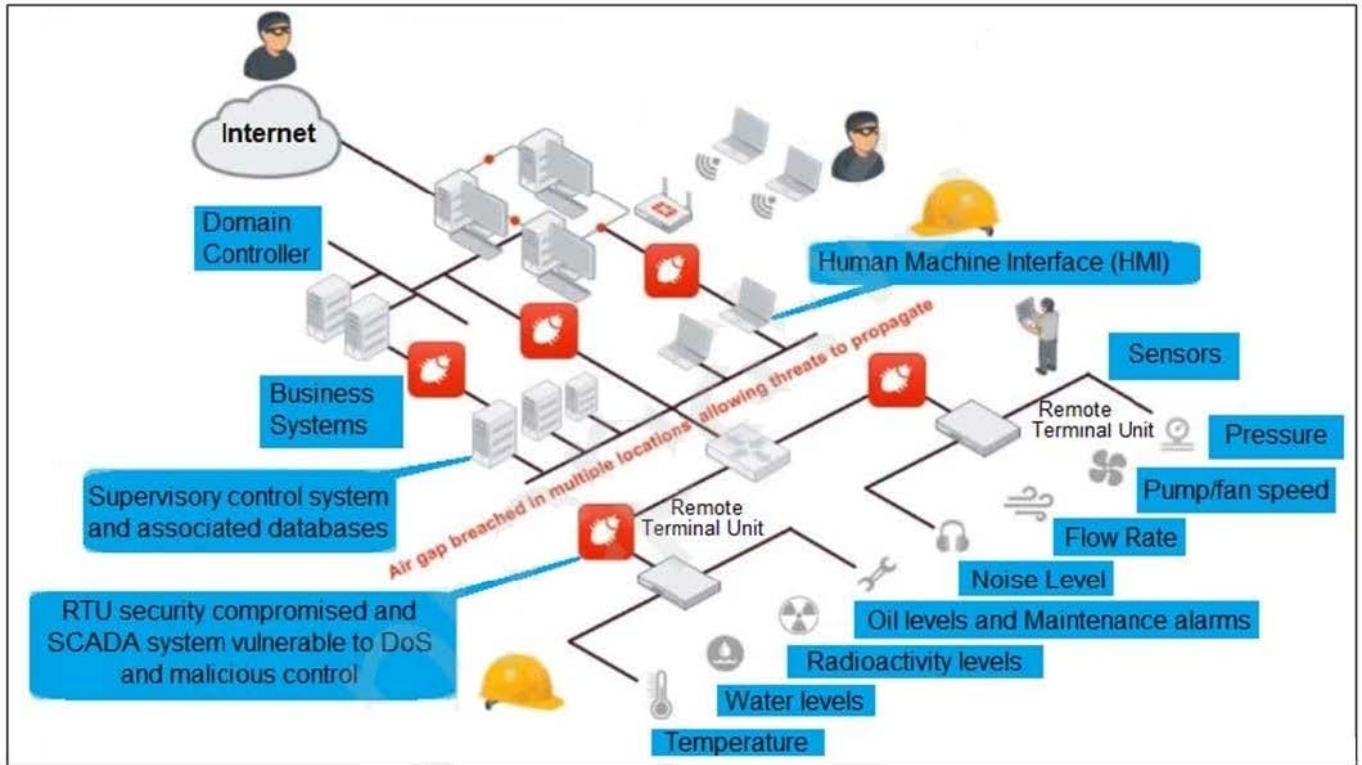

An administrator needs to implement proper protection on the OT network.

Which three steps should an administrator take to protect the OT network? (Choose three.)

- A. Deploy an edge FortiGate between the internet and an OT network as a one-arm sniffer.
- B. Deploy a FortiGate device within each ICS network.
- C. Configure firewall policies with web filter to protect the different ICS networks.
- D. Configure firewall policies with industrial protocol sensors
- E. Use segmentation

Correct Answer: ACD

QUESTION 5

Refer to the exhibit and analyze the output.



```
[PH_DEV_MON_NET_INTF_UTIL] : [eventSeverity] =PHL_INFO, [filename] =phPerfJob.cpp,
[lineNumber] =6646, [intfName]= Intel [R] PRO_100 MT Network
Connection, [intfAlias] =, [hostname] =WIN2K8DC, [hostIpAddr] = 192.168.69.6,
[pollIntv] =56, [recvBytes64] =
44273, [recvBitsPerSec] = 6324.714286, [inIntfUtil] = 0.000632, [sentBytes64] =
82014, [sentBitsPerSec] = 1171
6.285714, [outIntfUtil] = 0.001172, [recvPkts64] = 449, [sentPkts64] = 255,
[inIntfPktErr] = 0, [inIntfPktErrPct] = 0.000000, [outIntfPktErr] =0,
[outIntfPktErrPct] = 0.000000, [inIntfPktDiscarded] =0, [inIntfPktDiscardedPct] =
```

Which statement about the output is true?

- A. This is a sample of a FortiAnalyzer system interface event log.
- B. This is a sample of an SNMP temperature control event log.
- C. This is a sample of a PAM event type.
- D. This is a sample of FortiGate interface statistics.

Correct Answer: A

[NSE7_OTS-6.4 Practice Test](#)

[NSE7_OTS-6.4 Study Guide](#)

[NSE7_OTS-6.4 Braindumps](#)