



1Z0-591^{Q&As}

Oracle Business Intelligence Foundation Suite 11g Essentials

Pass Oracle 1Z0-591 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/1z0-591.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Oracle
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

Which OBIEE capability enables developers to build Aggregate tables?

- A. Aggregate Persistence Wizard
- B. Expression Builder
- C. Table Builder
- D. Query Analyzer

Correct Answer: A

Explanation: Aggregate Persistence Wizard automates the creation and initial population of aggregates, persists them in a back-end database and configures the BI Server metadata layer so that they're used when appropriate.

QUESTION 2

Which two options are valid Repository Variable names?

- A. USER
- B. CurrentDay
- C. CurrentMonth
- D. Date

Correct Answer: BC

Explanation: CurrentDay and CurrentMonth can be calculated by a sql statement.

Note:

REPOSITORY VARIABLE(DYNAMIC)

?Initialized when BI server is started

?Assigned value dynamically based on the result of a query ?Value is dependent of the sql provided in Initialization Block Create a dynamic variable and provide a Name and Default Initializer.Create a new initialization block by clicking on the

New button in the above screen.



Dynamic Repository Variable - Datawarehouse...

Name: Datawarehouse Name

Type:

☐ Static

☒ Dynamic

Initialization Block:

not assigned New...

Default Initializer:

'DW name not found'

Description

OK Cancel Help

Provide Initialization Block variable Name

QUESTION 3

In the Oracle Data Warehouse Reference Architecture, which term is not a layer in the data warehouse?

- A. Access and Performance Layer
- B. Master Data Layer
- C. Staging Data Layer
- D. Presentation Data Layer

Correct Answer: D

QUESTION 4

Initialization Blocks are never used to initialize which option?

- A. Dynamic Repository Variables
- B. System Session Variables
- C. Non System Session Variables



D. rpd file

Correct Answer: D

Explanation: Initialization blocks are used to initialize dynamic repository variables, system session variables, and nonsystem session variables.

QUESTION 5

OBIEE default security model stores security Information such as user names and password combinations for accessing an external system such as Active Directory. It is stored in the_____.


- A. Policy Store
- B. Credential Store
- C. Identity Store
- D. Person Store

Correct Answer: C

Explanation: Identity Store: It is directory server to perform the authentication. It contains user name , password and groups membership information .When a user name and password combination is entered at log in, the authentication

provider searches the identity store to verify the credentials provided.

See figure below.

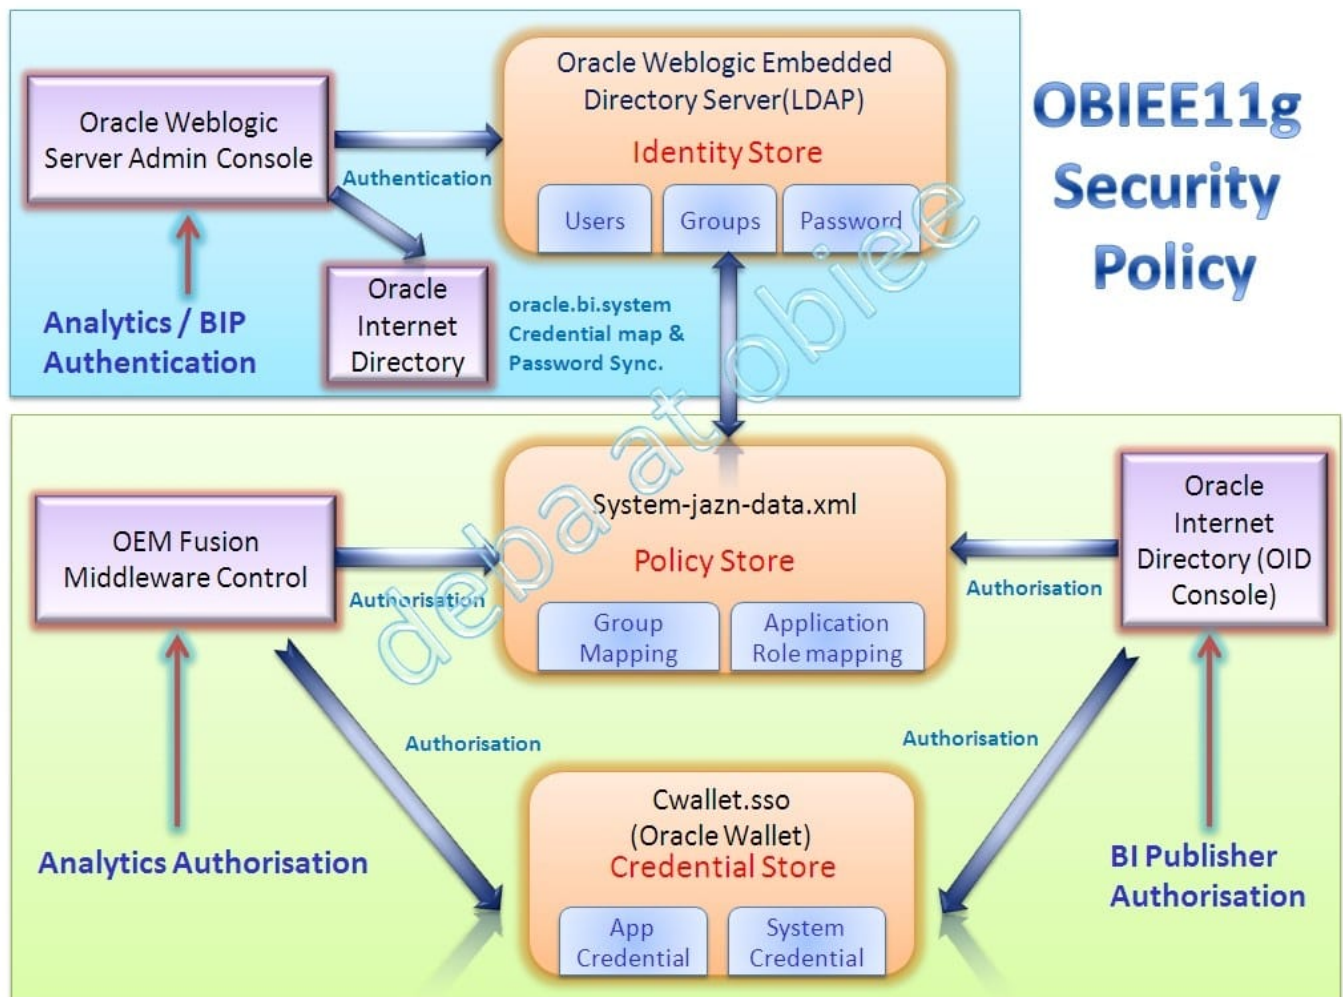

[Latest 1Z0-591 Dumps](#)

[1Z0-591 VCE Dumps](#)

[1Z0-591 Study Guide](#)