https://www.geekcert.com/c9530-272.html
GeekCert.com

C9530-272^{Q&As}

IBM WebSphere Message Broker V8.0 Solution Development

Pass IBM C9530-272 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.geekcert.com/c9530-272.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by IBM Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update
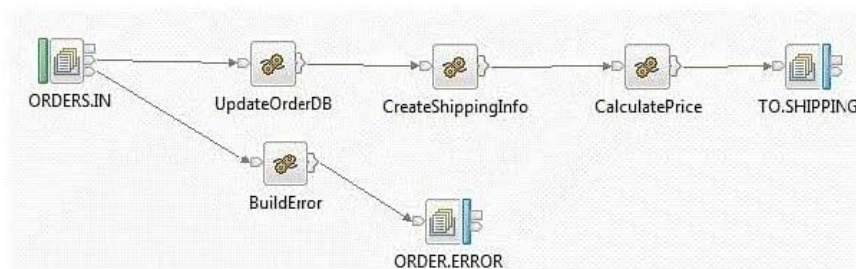
⚙ **800,000+** Satisfied Customers

QUESTION 1

A company has its own internal application App1 which exposes its products price catalog to its clients via MQ transport protocol. The company needs to build a new proxy mediation application using Message Broker to expose its service to external clients. The suggested mediation flow would accept the request from different clients, route the request to App1 and send the response back to the requesting client where each client has its own target queue. Which built-in pattern should the solution developer use to achieve this?

A. Message Request Response Correlator

B. Service Proxy: static endpoint pattern

C. Service Access from WebSphere MQ

D. Service Facade to WebSphere MQ: request-response pattern

Correct Answer: A

QUESTION 2

A solution developer needs to enhance a message flow with node information to aid in problem resolution, should there be a failure within the flow. Consider the following flow, named "OrderProcess".

In the 3 Compute nodes, UpdateOrderDB, CreateShppingInfo and CalculatePrice, the solution developer inserts the following statements as the first 2 lines of ESQL:

```
SET OutputLocalEnvironment = InputLocalEnvironment;
SET OutputLocalEnvironment.Node = NodeLabel;
```

The BuildError Compute, which is linked to the ORDERS.IN Catch termina , has the following ESQL added:

```
CREATE FIELD OutputRoot.XMLNSC.Fail.Location
            VALUE MessageFlowLabel ||
            '.' ||
            InputLocalEnvironment.Node;
```

On testing the flow, there is a failure within the CalculatePrice node.

What is the content of the Location tag in the message written to the ORDER.ERROR queue?

A.

B. OrderProcess.

C. OrderProcess.CalculatePrice

D. OrderProcess.CreateShippingInfoD.OrderProcess.Creat eShippingInfo

Correct Answer: A

QUESTION 3

A solution developer needs to import a WSDL into an Application. The WSDL references a set of XML Schemas that contain xsd:import statements as well as xsd:redefine statements. What happens when the solution developer imports this WSDL into an Application?

A. The XSDs are imported without error into the main application

B. A pop-up dialog appears asking the developer how to resolve the redefine statements.

C. The WSDL and XSDs are imported, but errors appear saying that redefines are not supported.

D. The WSDL is imported into the main application, the XSDs are imported into a dependent Library

Correct Answer: C

QUESTION 4

A solution developer needs to use the recording data feature for auditing purpose. The expected message size is up to 10 MB and the target database is DB2. Aside from the default, what additional configuration (s), if any, does the solution developer need to do?

A. Use the supplied DB2 schema without changes.

B. Update the DataCaptureStore configurable service to allow the extra size.

C. Customize the supplied DB2 schema to increase the maximum message body size.

D. Create a new database table to store the message body and configure the broker to use the new table.

Correct Answer: C

QUESTION 5

A telecommunications customer needs to develop a flow that sends a message to invoke an existing business process on WebSphere Process Server (WPS). The requirements do not call for a response message back from the flow. Which node should the solution developer use to send the message to WPS?

A. SOAPRequest

B. CORBARequest

C. SCAReply

D. SCAAsyncRequest

Correct Answer: D