



C9530-272^{Q&As}

IBM WebSphere Message Broker V8.0 Solution Development

Pass IBM C9530-272 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/c9530-272.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by IBM Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

A company has implemented the following message flow to process orders received:

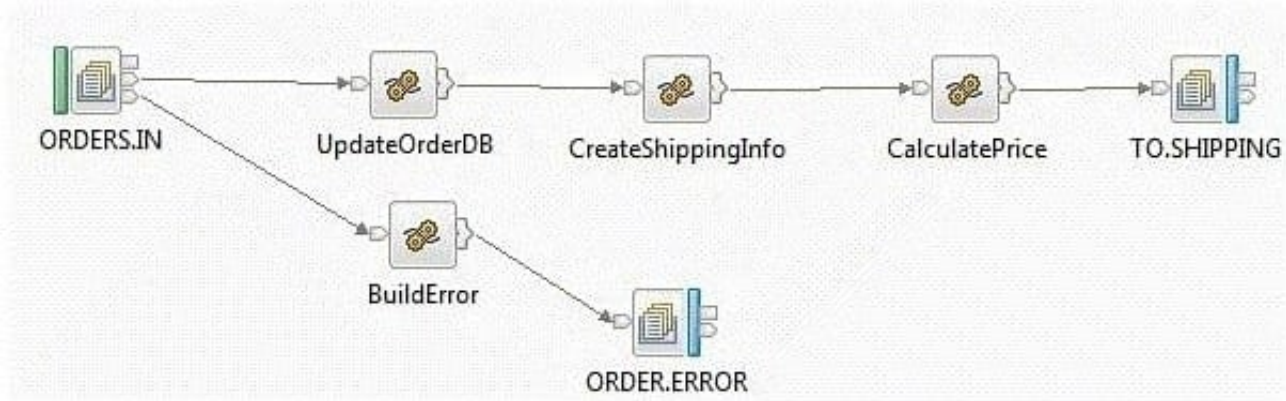

The ORDERS.IN node has the Transaction mode set to Yes.

When a failure occurs in the CalculatePrice node it is noticed that the database updates performed in the UpdateOrderDB node are not rolled back. How should the solution developer modify the flow in order to rollback the database updates in the event of a failure?

- A. Add a Throw node following ORDER.ERROR.
- B. Change the Transaction mode of ORDERS.IN to Automatic.
- C. Set the Throw exception on database error property on UpdateOrderDB.
- D. Insert a TryCatch node between UpdateOrderDB and CreateShippingInfo to handle the error.

Correct Answer: A

QUESTION 2

A solution developer needs to deploy a message flow initially in "Stopped" state. How must the solution developer achieve this?

- A. Set the Start Mode property on the broker archive BAR file to "Manual" status
- B. Set the Start Mode property on the broker archive BAR file to "Stopped" status
- C. Set the Start Mode property on the broker archive BAR file to "Maintained" status
- D. Use the mqsisstopmsgflow command to stop the message flows once they have been deployed.

Correct Answer: A

QUESTION 3



A broker application is deployed in a test environment. It is reported to be taking a long time to process messages. The solution developer is asked to find the average time taken by this broker application. The solution developer can determine this by enabling:

- A. Service Trace
- B. Resource Statistics
- C. Message Flow Statistics
- D. Message Queue Statistics

Correct Answer: C

QUESTION 4

A solution developer needs to import a WSDL into an Application. The WSDL references a set of XML Schemas that contain xsd:import statements as well as xsd:redefine statements. What happens when the solution developer imports this WSDL into an Application?

- A. The XSDs are imported without error into the main application
- B. A pop-up dialog appears asking the developer how to resolve the redefine statements.
- C. The WSDL and XSDs are imported, but errors appear saying that redefines are not supported.
- D. The WSDL is imported into the main application, the XSDs are imported into a dependent Library

Correct Answer: C

QUESTION 5

An international fund transfer acknowledgement message having the below format is to be validated, before being sent to the payment gateway.

```
{1:F01IBMADEFOAXXX0000000000} {2:I103IBMADEFOAEXXN} {3:{108:103 0003ACK }} {4:  
:20:16x  
:23B:SPAY  
:32A:001118USD3,34  
:33B:USD3,34  
:50A:/34x  
CHASJS33  
:59:/34x  
4X35x  
:71A:BEN  
:71F:USD1,34  
:77B:35x  
2X35x  
-}
```



A solution developer has to implement a message validator for these transactions. What message domain should the solution developer use to do so?

- A. MIME
- B. MRM-TDS
- C. MRM-CWF
- D. DataObject

Correct Answer: B

[C9530-272 VCE Dumps](#)

[C9530-272 Practice Test](#)

[C9530-272 Exam Questions](#)