



# C9530-404<sup>Q&As</sup>

IBM Integration Bus V9.0 Solution Development

**Pass IBM C9530-404 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/c9530-404.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by IBM Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





### QUESTION 1

A company needs to implement a generic gateway application which accepts COBOL input messages using WebSphere MQ transport. The first 15 bytes of each input message represents a common header for all messages. The 15 bytes header is used to determine the message type, length and routing information.

Which domain parser should the solution developer set in the input node to accomplish this?

- A. MIME
- B. BLOB
- C. JSON
- D. DataObject

Correct Answer: B

---

### QUESTION 2

A business analyst is developing a Business Process Diagram which needs some business data from an external corporate service. The business analyst defined the inputs/outputs for the IBM Business Process Management (BPM) Standard Edition integration service and exported all information as a .twx file and delivered it to the IBM Integration Bus solution developer.

What is the next step that the developer should take?

- A. Define a WSDL interface based on the information in the .twx file.
- B. Import the .twx file to create integration service in the Integration Toolkit.
- C. Import the .twx file to create DFDL schema definition in the Integration Toolkit.
- D. Use the BPM Toolkit to convert the .twx file into BAR file suitable for the Integration Toolkit.

Correct Answer: A

---

### QUESTION 3

A financial institution runs IBM Integration Bus V9.0 as a messaging backbone for financial payments. A legal requirement is fraud detection of the payments. This requirement should be solved with IBM Integration Bus V9.0 business rules functionality. However, rule development and flow development phases are not aligned. In production, rules get updated weekly but message flows get updated quarterly.

Which component should the solution developer use to implement this requirement?

- A. HTTPRequest node
- B. SOAPRequest node
- C. UserDefined configurable service




D. DecisionServiceRepository configurable service

Correct Answer: A

#### QUESTION 4

A solution developer has developed a message flow that is in an application named App5 shown below.

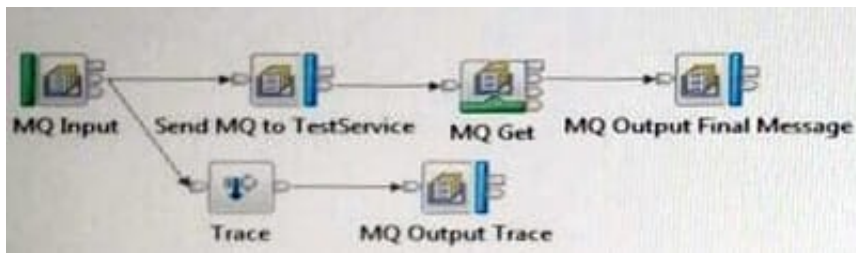

A second application, named TestService, contains the message flow that processes messages sent from the Send MQ to TestService MQ Output node and returns the response message that is then retrieved by the MQ Get node. This application is already deployed to the Integration Server that is named default.

The solution developer wants to use the Test Client to test App5. The Test Client preferences are the defaults. The application has been deployed using a BAR file named App5.bar to the Integration Server that is named default.

What configuration is required in the Test Client to test App5 to the end of the message flow?

- A. 1. In Message Flows add the TestService application.  
2. From MQ Settings, clear the checkbox for Stop when the first MQ message is received.
- B. 1. In Deployment settings, set Deployment Options to Always rebuild and deploy a Broker Archive automatically.  
2. From MQ Settings, clear the checkbox for Stop when the first MQ message is received.
- C. 1. In Deployment settings, set Deployment Options to I will deploy the specified Broker Archive manually.  
2. Set Specify Broker Archive file parameter to App5.bar.  
3.  
Set Deployment location to the correct location with the default Integration Server where App5 is deployed.
4.  
Select (check) the checkbox for Stop when the first MQ message is received.
- D. In Deployment settings, set Deployment Options to I will deploy the specified Broker Archive manually.  
2.  
Set Specify Broker Archive file parameter to App5.bar.  
3.  
Set Deployment location to the correct location with the default Integration Server where App5 is deployed.



---

4.

From MQ Settings, clear the checkbox for Stop when the first MQ message is received.

Correct Answer: B

---

#### QUESTION 5

A solution developer needs to implement a message flow that invokes a Business Process Execution Language (BPEL) process in IBM Business Process Manager Advanced Version V7.5 and continue processing the message in the message flow without waiting for a response.

Which node should the developer use?

- A. CORBARequest
- B. SOAPRequest
- C. SCAResult
- D. SCAAsyncRequest

Correct Answer: C

[C9530-404 PDF Dumps](#)

[C9530-404 VCE Dumps](#)

[C9530-404 Practice Test](#)