



C9550-412^{Q&As}

IBM Business Process Management Express or Standard Edition
V8.5.5, BPM Application Development

Pass IBM C9550-412 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/c9550-412.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by IBM Official
Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

A corporation has an existing user portal and would like to keep the same look and feel when using IBM business process manager. The corporation wants to access their own portal to initiate tasks and work on them instead of the BPM process portal. The corporation has decided to address this requirement by using BPM REST APIs to access BPM resources.

```
PUT http://host1.company.com:9080/rest/bpm/wle/v1/task/3?
action=finish&params={"empid":"5","empname":
{"firstName":"John","lastName":"Kramer"}}
Headers:
Accept application/json
```

When the BPM application developer is testing an API call similar to the one below, it sometimes fails, because the URI is too long.

- ☐ A. POST http://host1.company.com:9080/rest/bpm/wle/v1/task/3
Headers:
Accept application/json
Content-Type: application/x-www-form-urlencoded
X-Method-Override: PUT
Request Body:
action=finish¶ms={"empid":"5","empName":
{"firstName":"John","lastName":"Kramer"}}
- ☐ B. POST http://host1.company.com:9080/rest/bpm/wle/v1/task/3?
action=finish¶ms={"empid":"5","empname":
{"firstName":"John","lastName":"Kramer"}}
Headers:
Accept application/json
Content-Type: application/x-www-form-urlencoded
X-Method-Override: PUT

- ☐ C. PUT http://host1.company.com:9080/rest/bpm/wle/v1/task/3
Headers:
Accept application/json
Content-Type: application/octet-stream
Request Body:
action=finish¶ms={"empid":"5","empName":
{"firstName":"John","lastName":"Kramer"}}
- ☐ D. PUT http://host1.company.com:9080/rest/bpm/wle/v1/task/3
Headers:
Accept application/json
Content-Type: application/octet-stream
X-Method-Override: PUT
Request Body:
action=finish¶ms={"empid":"5","empName":
{"firstName":"John","lastName":"Kramer"}}

- A. Exhibit A
- B. Exhibit B
- C. Exhibit C
- D. Exhibit D



Correct Answer: B

QUESTION 2


After deploying a new snapshot and migrating its instances to the new snapshot, a BPM application developer has found some instances with orphaned tokens. Which API must the BPM application developer use to manage the orphaned tokens?

- A. Java
- B. REST
- C. JavaScript
- D. Web Services

Correct Answer: B


QUESTION 3

A construction company is using IBM business process manager to review projects. Every project should be reviewed and scored by several subject matter experts (SME) before it is approved. The number of reviews depends on a business rule that is evaluated at runtime. All the reviews should be executed at the same time by a different SME. Each review is recorded individually and should include the SME user ID. The company decided that no specific order is required for the final list of completed reviews. If the score of the process reaches the minimal total score required before all the reviews have been completed, the process should continue and all pending review should be interrupted. For this requirement, a BPM application developer is using a multi-instance loop (user task) and a decision task. The following JavaScript function is included in a server file. The `minimumScoreReached` function is defined so that the order of the final list of completed reviews is not supported.

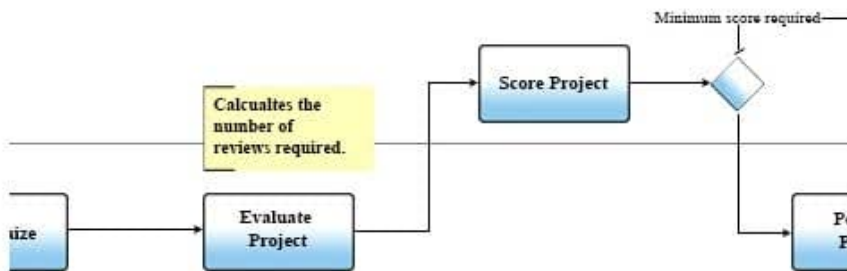


```
1 var Namespace = {
2   minimumScoreReached : function () {
3     var reviews = tw.local.reviews;
4     var limit = reviews.Listlength; var score = 0;
5     for ( var idx = 0 : idx < limit : idx++ ) {
6       score += reviews(idx).score;
7     }
8     log.info ( "log" score "" + score );
9     log.info ( "log" minimum score "" + tw.epv.exposedProjectVariables.minimumScore );
10    return (score > tw.epv.exposedProjectVariables.minimumScore) ? true : false;
11  }
12 }
```

Variable in the Business Process Definition (BPD) are defined as follow:

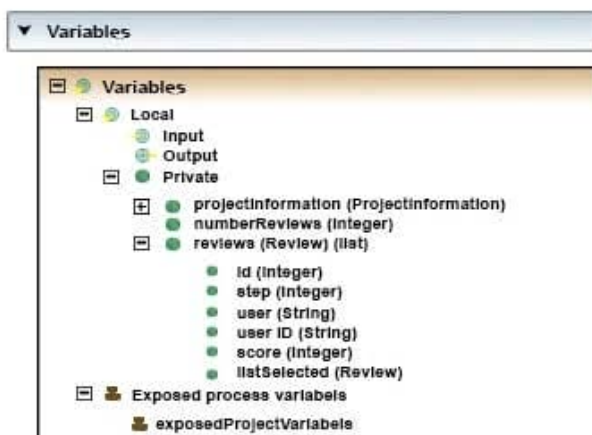

Variable for **Score Project** task are:

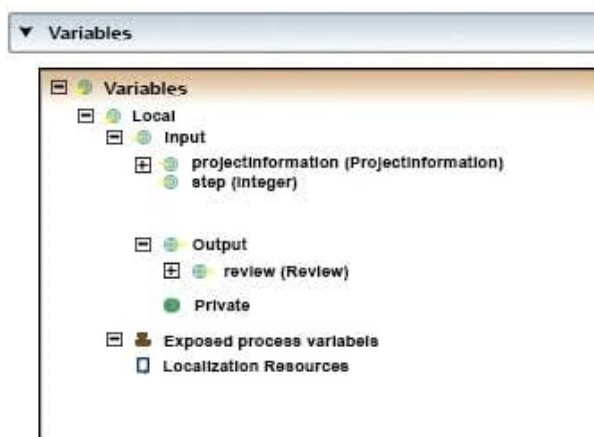



The screenshot displays the configuration interface for a BPM application. The 'Behavior' section is expanded, showing 'Loop Type' set to 'Multi-instance Loop'. Under 'Multiple-instance Loop', 'Start Quantity' is 'tw.local.numberReviews', 'Ordering' is 'Run in Parallel', 'Flow Condition' is 'Conditional Wait (Complex)', and 'Complex Flow Condition' is '1'. The 'Cancel Remaining Instances' checkbox is checked. Below this, the 'Simple Loop' section is collapsed. The 'Input Mapping' section shows 'tw.local.projectInformation' mapped to 'projectInformation (...)' and 'tw.system.step.counter' mapped to 'step (Integer)'. The 'Output Mapping' section shows 'review (Review)' mapped to an empty field.

How should the BPM application developer configure the behavior and data mapping for the multi-instance loop? (choose 2)

- A. Map review output variable to tw.local.reviews Q in the Output Mapping section.
- B. Map review output variable to tw.local.reviews [tw.local.reviews.listLength] in the Output Mapping section.
- C. Write Namespace.minimumScoreReachedQ in the Complex Flow Condition field
- D. Write return Namespace.minimumScoreReachedQ in the Complex Flow Condition field
- E. Add a new step output variable to the human service, and then use the following in the Output Mapping section: Map step output variable to tw.local.step Map review output variable to tw.local.reviews! tw.local.step]

Correct Answer: DE

QUESTION 4

A BPM application developer needs to create a custom dashboard to show the maximum, minimum and average sales in the last 12 months. Only the sales managers can view the data in the dashboard in the process portal. In the exposure section of the custom dashboard, which setting must the application developer set for the sales manager to view the data?

- A. Set the "Expose to" field to Sales Managers.
- B. Set the "Expose to start" field to Sales Managers.
- C. Set the "Expose Business Data" field to Sales Managers.
- D. Set the "Expose Performance Metrics" field to Sales Managers.

Correct Answer: A

QUESTION 5



A financial services company has implemented their first BPM application for their account opening process. During their second BPM project another line of business is also working on their version of an Account Opening process, and has identified several components from the first application that they want to reuse. What should the BPM application developer do to reuse these components?

- A. Copy the elements of an account opening to the second process application as not to duplicate work.
- B. Copy the elements of an account opening to a new toolkit that is used by the second process application and leave the first process untouched.
- C. Take a snapshot of the first process application and make the second process application dependent on this snapshot.
- D. Move the elements of an account opening to a new toolkit and make both process applications dependent of the new toolkit.

Correct Answer: D

[Latest C9550-412 Dumps](#)

[C9550-412 Practice Test](#)

[C9550-412 Exam Questions](#)