



CKAD^{Q&As}

Certified Kubernetes Application Developer (CKAD) Program

Pass Linux Foundation CKAD Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/ckad.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Linux Foundation Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers






QUESTION 1

CORRECT TEXT

```
student@node-1:~$ kubectl top pods -n cpu-stress
NAME                CPU (cores)  MEMORY (bytes)
max-load-98b9se     68m          6Mi
max-load-ab2d3s     21m          6Mi
max-load-kipb9a     45m          6Mi
student@node-1:~$ echo "max-load-98b9se" > /opt/κDOB00301/pod.txt
```

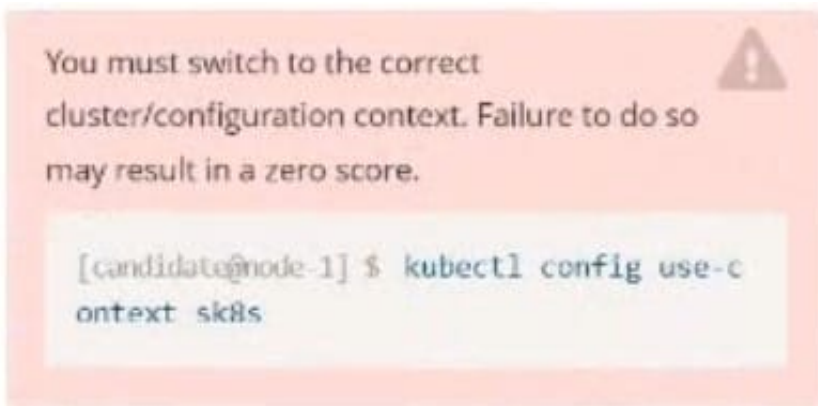

Task:

Update the Deployment app-1 in the frontend namespace to use the existing ServiceAccount app.

- A. Please check explanations
- B. Place Holder

Correct Answer: A



```
File Edit View Terminal Tabs Help
The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

candidate@node-1:~$ vi ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl config use-context sk8s
Switched to context "sk8s".
candidate@node-1:~$ vim .vimrc
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl apply -f ~/spicy-pikachu/backend-deployment.yaml
deployment.apps/backend-deployment configured
candidate@node-1:~$ kubectl get pods -n staging
NAME                                READY   STATUS    RESTARTS   AGE
backend-deployment-59d449b99d-cxct6  1/1     Running   0           20s
backend-deployment-59d449b99d-h2zjq  0/1     Running   0           9s
backend-deployment-78976f74f5-b8c85  1/1     Running   0           6h40m
backend-deployment-78976f74f5-flfsj  1/1     Running   0           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment  3/3     3             3           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment  3/3     3             3           6h41m
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl set serviceaccount deploy app-1 app -n frontend
deployment.apps/app-1 serviceaccount updated
candidate@node-1:~$
```

QUESTION 2

CORRECT TEXT



Context

Your application's namespace requires a specific service account to be used.

Task

Update the app-a deployment in the production namespace to run as the restrictedservice service account.

The service account has already been created.



A. Please check explanations

B. Place Holder

Correct Answer: A

```
student@node-1:~$ kubectl get serviceaccount -n production
NAME          SECRETS  AGE
default       1        6h46m
restrictedservice 1        6h46m
student@node-1:~$ kubectl get deployment -n production
NAME    READY  UP-TO-DATE  AVAILABLE  AGE
app-a   3/3    3           3          6h46m
student@node-1:~$ kubectl set serviceaccount deployment app-a restrictedservice -n production
deployment.apps/app-a serviceaccount updated
student@node-1:~$
```

QUESTION 3

CORRECT TEXT

You must switch to the correct cluster/configuration context. Failure to do so may result in a zero score.

```
[candidate@node-1] $ kubectl config use-c
ontext sk8s
```

Task:



Key3: value1

Add an environment variable named BEST_VARIABLE consuming the value of the secret key3.

A. Please check explanations

B. Place Holder

Correct Answer: A


```
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl create secret generic app-secret -n default --from-literal=key3=value1
secret/app-secret created
candidate@node-1:~$ kubectl get secrets
NAME          TYPE      DATA      AGE
app-secret    Opaque    1          4s
candidate@node-1:~$ kubectl run nginx-secret -n default --image=nginx:stable --dry-run=client -o yaml > sec.yaml
candidate@node-1:~$ vim sec.yaml
```

```
File Edit View Terminal Tabs Help
apiVersion: v1
kind: Pod
metadata:
  creationTimestamp: null
  labels:
    run: nginx-secret
  name: nginx-secret
  namespace: default
spec:
  containers:
  - image: nginx:stable
    name: nginx-secret
    env:
    - name: BEST_VARIABLE
      valueFrom:
        secretKeyRef:
          name: app-secret
          key: key3
:wq
```

```
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl create secret generic app-secret -n default --from-literal=key3=value1
secret/app-secret created
candidate@node-1:~$ kubectl get secrets
NAME          TYPE      DATA      AGE
app-secret    Opaque    1          4s
candidate@node-1:~$ kubectl run nginx-secret -n default --image=nginx:stable --dry-run=client -o yaml > sec.yaml
candidate@node-1:~$ vim sec.yaml
candidate@node-1:~$ kubectl create -f sec.yaml
pod/nginx-secret created
candidate@node-1:~$ kubectl get pods
NAME          READY   STATUS    RESTARTS   AGE
nginx-secret  1/1     Running   0          7s
candidate@node-1:~$
```

**QUESTION 4**

CORRECT TEXT

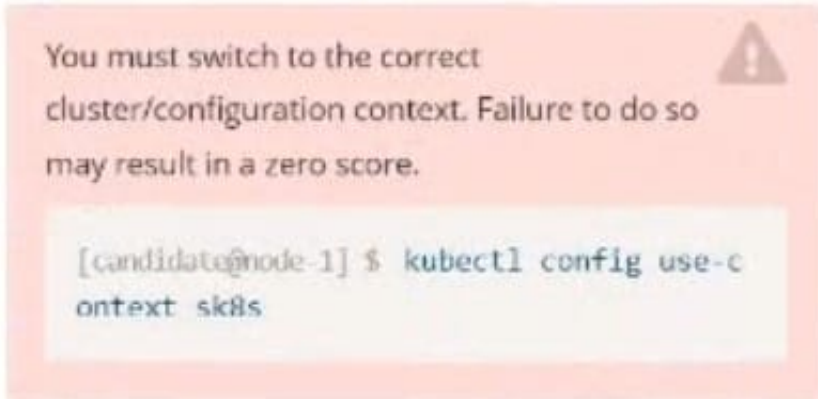

Task:

A pod within the Deployment named buffalo-deployment and in namespace gorilla is logging errors.

Look at the logs identify errors messages.

Find errors, including User "system:serviceaccount:gorilla:default" cannot list resource "deployment" [...] in the namespace "gorilla"

The buffalo-deployment `S manifest can be found at `-/prompt/escargot/buffalo- deployment.yaml`

A. Please check explanations

B. Place Holder

Correct Answer: A



```
File Edit View Terminal Tabs Help
deployment.apps/backend-deployment configured
candidate@node-1:~$ kubectl get pods -n staging
NAME                                READY   STATUS    RESTARTS   AGE
backend-deployment-59d449b99d-cxct6 1/1     Running   0           20s
backend-deployment-59d449b99d-h2zjq 0/1     Running   0           9s
backend-deployment-78976f74f5-b8c85 1/1     Running   0           6h40m
backend-deployment-78976f74f5-flfsj 1/1     Running   0           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment 3/3     3             3           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment 3/3     3             3           6h41m
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl set serviceaccount deploy app-1 app -n frontend
deployment.apps/app-1 serviceaccount updated
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ vim ~/prompt-escargot/buffalo-deployment.yaml
candidate@node-1:~$ vim ~/prompt-escargot/buffalo-deployment.yaml
candidate@node-1:~$ kubectl apply -f ~/prompt-escargot/buffalo-deployment.yaml
deployment.apps/buffalo-deployment configured
candidate@node-1:~$ kubectl get pods -n gorilla
NAME                                READY   STATUS              RESTARTS   AGE
buffalo-deployment-776844df7f-r5fsb 1/1     Running             0           5h38m
buffalo-deployment-859898c6f5-zx5gj 0/1     ContainerCreating   0           8s
candidate@node-1:~$ kubectl get deploy -n gorilla
NAME                READY   UP-TO-DATE   AVAILABLE   AGE
buffalo-deployment 1/1     1             1           6h38m
candidate@node-1:~$
```

QUESTION 5

CORRECT TEXT



Task

You are required to create a pod that requests a certain amount of CPU and memory, so it gets scheduled to a node that has those resources available.

1.

Create a pod named `nginx-resources` in the `pod-resources` namespace that requests a minimum of 200m CPU and 1Gi memory for its container

2.



The pod should use the nginx image

3.

The pod-resources namespace has already been created

A. Please check explanations

B. Place Holder

Correct Answer: A

```
student@node-1:~$ kubectl run nginx-resources -n pod-resources --image=nginx --dry-run=client -o
yaml > nginx_resources.yml
student@node-1:~$ vim nginx
```




```
Readme Web Terminal THE LINUX FOUNDATION
apiVersion: v1
kind: Pod
metadata:
  creationTimestamp: null
  labels:
    run: nginx-resources
  name: nginx-resources
  namespace: pod-resources
spec:
  containers:
  - image: nginx
    name: nginx-resources
    resources: {}
  dnsPolicy: ClusterFirst
  restartPolicy: Always
status: {}

"nginx_resources.yml" 16L, 289C 1,1 All
```

```
Readme Web Terminal THE LINUX FOUNDATION
apiVersion: v1
kind: Pod
metadata:
  labels:
    run: nginx-resources
  name: nginx-resources
  namespace: pod-resources
spec:
  containers:
  - image: nginx
    name: nginx-resources
    resources:
      requests:
        cpu: 200m
        memory: "1Gi"
-- INSERT --

15,22 All
```



```
student@node-1:~$ kubectl run nginx-resources -n pod-resources --image=nginx --dry-run=client -o
yaml > nginx_resources.yml
student@node-1:~$ vim nginx_resources.yml
student@node-1:~$ kubectl create -g nginx_resources.yml
Error: unknown shorthand flag: 'g' in -g
See 'kubectl create --help' for usage.
student@node-1:~$ kubectl create -f nginx_resources.yml
pod/nginx-resources created
student@node-1:~$ kubectl get pods -n pod-ra
```

```
student@node-1:~$ kubectl get pods -n pod-resources
NAME          READY   STATUS    RESTARTS   AGE
nginx-resources 1/1     Running   0           8s
student@node-1:~$
```

[CKAD PDF Dumps](#)

[CKAD Practice Test](#)

[CKAD Study Guide](#)