



CKAD^{Q&As}

Certified Kubernetes Application Developer (CKAD) Program

Pass Linux Foundation CKAD Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/ckad.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Linux Foundation Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

CORRECT TEXT


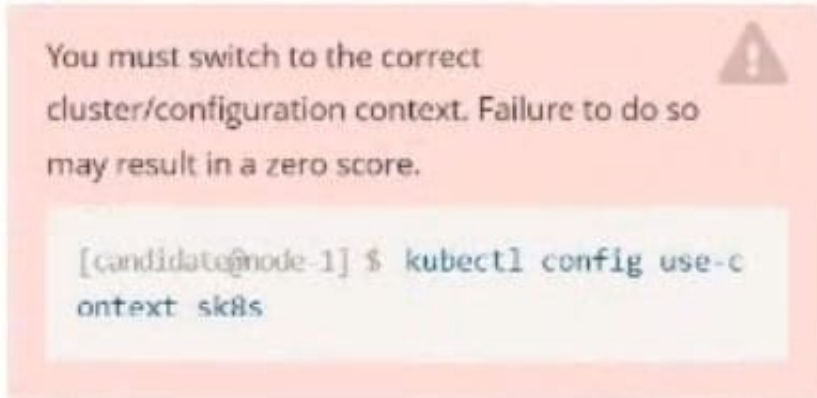


Context

You are asked to prepare a Canary deployment for testing a new application release.

Task:

A Service named krill-Service in the goshark namespace points to 5 pod created by the Deployment named current-krill-deployment

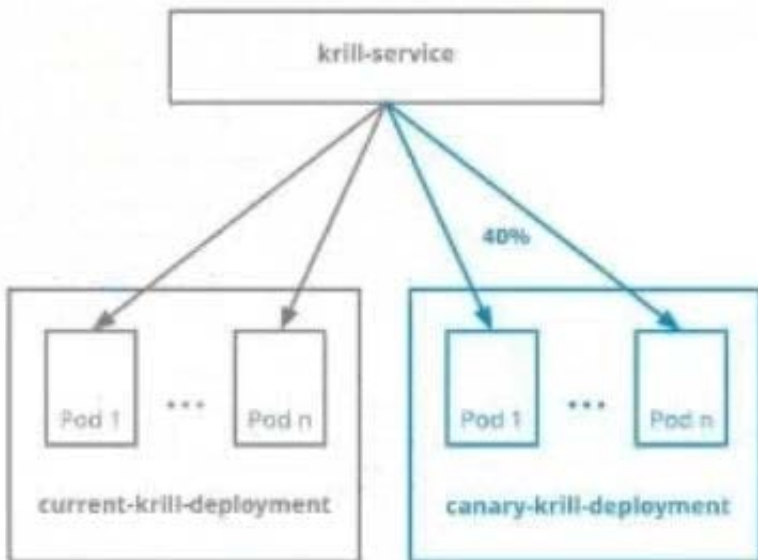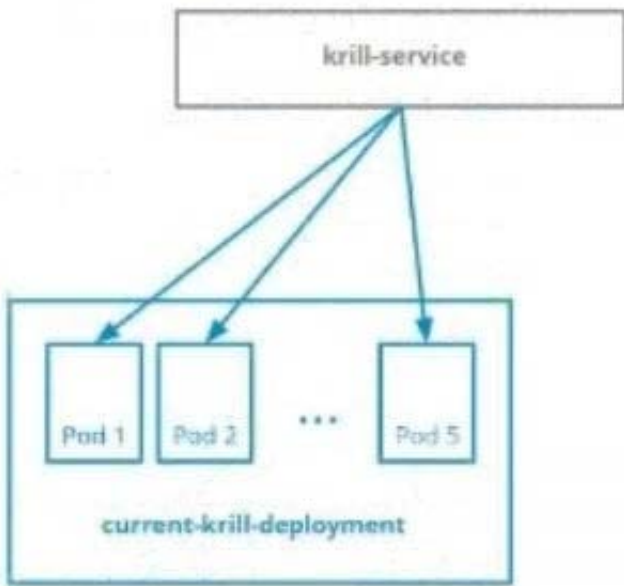

```
The Service is exposed on NodePort 30000. To test its load-balancing,
run:

[candidate@node-3] $ curl http://k8s-master-0:30000/
```

A. Please check explanations

B. Place Holder

Correct Answer: A



```
candidate@node-1:~/humane-storks$ kubectl scale deploy canary-krill-deployment --replicas 4 -n goshawk
deployment.apps/canary-krill-deployment scaled
candidate@node-1:~/humane-storks$ kubectl get deploy -n goshawk
NAME                READY   UP-TO-DATE   AVAILABLE   AGE
canary-krill-deployment  4/4     4             4           46s
current-krill-deployment  5/5     5             5           7h22m
candidate@node-1:~/humane-storks$ wget https://k8s.io/examples/
```

```
File Edit View Terminal Tabs Help
candidate@node-1:~/humane-storks$ wget https://k8s.io/examples/admin/resource/quota-pod.yaml
--2022-09-24 11:43:51-- https://k8s.io/examples/admin/resource/quota-pod.yaml
Resolving k8s.io (k8s.io)... 34.107.204.206, 2600:1901:0:26f3::
Connecting to k8s.io (k8s.io)|34.107.204.206|:443... connected.
HTTP request sent, awaiting response... 301 Moved Permanently
Location: https://kubernetes.io/examples/admin/resource/quota-pod.yaml [following]
--2022-09-24 11:43:52-- https://kubernetes.io/examples/admin/resource/quota-pod.yaml
Resolving kubernetes.io (kubernetes.io)... 147.75.40.148
Connecting to kubernetes.io (kubernetes.io)|147.75.40.148|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 90 [application/x-yaml]
Saving to: 'quota-pod.yaml'

quota-pod.yaml      100%[=====>]          90  --.-KB/s   in 0s

2022-09-24 11:43:52 (15.0 MB/s) - 'quota-pod.yaml' saved [90/90]


candidate@node-1:~/humane-storks$ vim quota-pod.yaml
```

```
File Edit View Terminal Tabs Help
2022-09-24 11:43:52 (15.0 MB/s) - 'quota-pod.yaml' saved [90/90]

candidate@node-1:~/humane-storks$ vim quota-pod.yaml
candidate@node-1:~/humane-storks$ kubectl create -f quota-pod.yaml
resourcequota/pod-demo created
candidate@node-1:~/humane-storks$ kubectl get quota -n go
No resources found in go namespace.
candidate@node-1:~/humane-storks$ kubectl get quota -n goshawk
NAME      AGE  REQUEST  LIMIT
pod-demo  19s  pods: 9/10
candidate@node-1:~/humane-storks$ curl http://k8s-master-0:30000/
current-krill-deployment-fb7c7995c-kvtjr
app.kubernetes.io/name="current"
app.kubernetes.io/part-of="krill"
pod-template-hash="fb7c7995c"candidate@node-1:~/humane-stork$ curl http://k8s-master-0:30000/
current-krill-deployment-fb7c7995c-4whfm
app.kubernetes.io/name="current"
app.kubernetes.io/part-of="krill"
pod-template-hash="fb7c7995c"candidate@node-1:~/humane-stork$ curl http://k8s-master-0:30000/
canary-krill-deployment-5f78fd4786-dfk7l
app.kubernetes.io/name="canary"
app.kubernetes.io/part-of="krill"
pod-template-hash="5f78fd4786"candidate@node-1:~/humane-stork$ curl http://k8s-master-0:30000/
canary-krill-deployment-5f78fd4786-25zrt
app.kubernetes.io/name="canary"
app.kubernetes.io/part-of="krill"
pod-template-hash="5f78fd4786"candidate@node-1:~/humane-stork$ curl http://k8s-master-0:30000/
canary-krill-deployment-5f78fd4786-2774b
app.kubernetes.io/name="canary"
app.kubernetes.io/part-of="krill"
pod-template-hash="5f78fd4786"candidate@node-1:~/humane-stork$
```

QUESTION 2

CORRECT TEXT

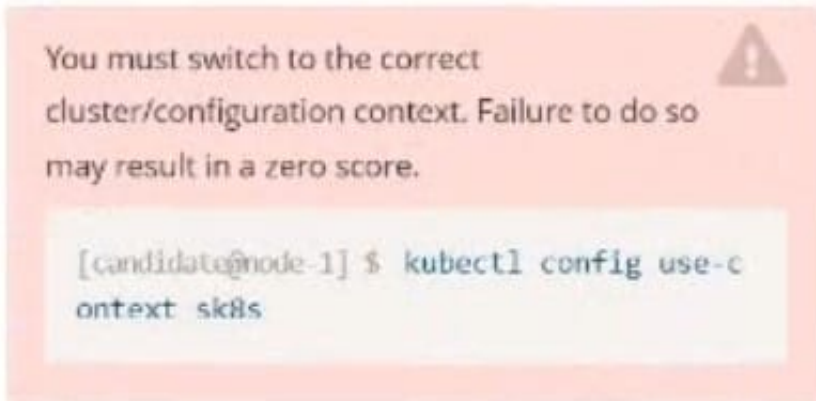

Task

A Deployment named backend-deployment in namespace staging runs a web application on port 8081.

*The Deployment's manifest files can be found at
~/spicy-pikachu/backend-deployment.yaml.*

Modify the Deployment specifying a readiness probe
using path /healthz.

Set initialDelaySeconds to 8 and periodSeconds to 5.

A. Please check explanations

B. Place Holder

Correct Answer: A



```
File Edit View Terminal Tabs Help
Warning: Permanently added '172.31.17.21' (ECDSA) to the list of known hosts.

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

candidate@node-1:~$ vi ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl config use-context sk8s
Switched to context "sk8s".
candidate@node-1:~$ vim .vimrc
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
```

```
File Edit View Terminal Tabs Help
apiVersion: apps/v1
kind: Deployment
metadata:
  name: backend-deployment
  namespace: staging
spec:
  selector:
    matchLabels:
      app: nginx
  replicas: 3
  template:
    metadata:
      labels:
        app: nginx
    spec:
      containers:
      - name: nginx
        image: nginx:1.14.2
        ports:
        - containerPort: 8081
        readinessProbe:
          initialDelaySeconds: 8
          periodSeconds: 5
          httpGet:
            path: /healthz
            port: 8081
      volumeMounts:
      - mountPath: /etc/nginx/conf.d/
        name: config
      - mountPath: /usr/share/nginx/html/
        name: www
-- INSERT --
```

26, 28 Top



```
File Edit View Terminal Tabs Help
Warning: Permanently added '172.31.17.21' (ECDSA) to the list of known hosts.

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

candidate@node-1:~$ vi ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl config use-context sk8s
Switched to context "sk8s".
candidate@node-1:~$ vim .vimrc
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl apply -f ~/spicy-pikachu/backend-deployment.yaml
deployment.apps/backend-deployment configured
candidate@node-1:~$ kubectl get pods -n staging
NAME                                READY   STATUS    RESTARTS   AGE
backend-deployment-59d449b99d-cxct6 1/1     Running   0           20s
backend-deployment-59d449b99d-h2zjq 0/1     Running   0           9s
backend-deployment-78976f74f5-b8c85 1/1     Running   0           6h40m
backend-deployment-78976f74f5-flfsj 1/1     Running   0           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                                READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment                  3/3     3             3           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                                READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment                  3/3     3             3           6h41m
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
```

QUESTION 3

CORRECT TEXT



Context

It is always useful to look at the resources your applications are consuming in a cluster.

Task

From the pods running in namespace cpu-stress, write the name only of the pod that is consuming the most CPU to file /opt/KDOBG030/pod.txt, which has already been created.

A. Please check explanations




B. Place Holder

Correct Answer: A

QUESTION 4

CORRECT TEXT

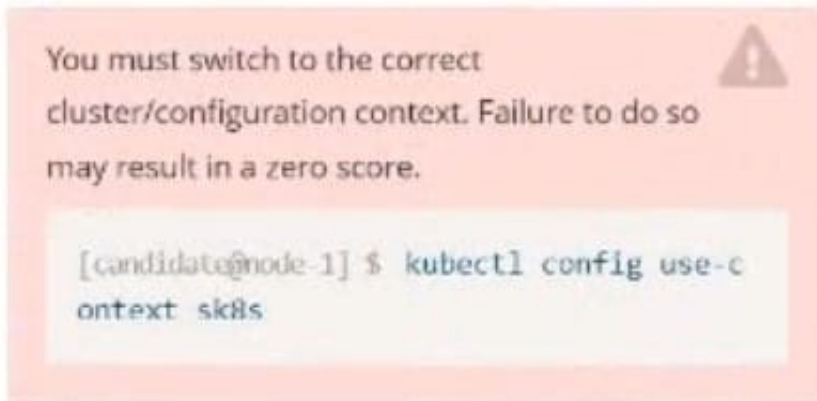

Task:

To run 2 replicas of the pod

Add the following label on the pod:

Role userUI

A. Please check explanations

B. Place Holder

Correct Answer: A



```
File Edit View Terminal Tabs Help
# reopened with the relevant failures.
#
apiVersion: apps/v1
kind: Deployment
metadata:
  annotations:
    deployment.kubernetes.io/revision: "1"
  creationTimestamp: "2022-09-24T04:27:03Z"
  generation: 1
  labels:
    app: nginx
  name: ckad00017-deployment
  namespace: ckad00017
  resourceVersion: "3349"
  uid: 1cd67613-fade-46e9-b741-94298b9c6e7c
spec:
  progressDeadlineSeconds: 600
  replicas: 2
  revisionHistoryLimit: 10
  selector:
    matchLabels:
      app: nginx
  strategy:
    rollingUpdate:
      maxSurge: 25%
      maxUnavailable: 25%
    type: RollingUpdate
  template:
    metadata:
      creationTimestamp: null
    labels:
-- INSERT --
```

33, 14

5%

```
File Edit View Terminal Tabs Help
name: ckad00017-deployment
namespace: ckad00017
resourceVersion: "3349"
uid: 1cd67613-fade-46e9-b741-94298b9c6e7c
spec:
  progressDeadlineSeconds: 600
  replicas: 2
  revisionHistoryLimit: 10
  selector:
    matchLabels:
      app: nginx
  strategy:
    rollingUpdate:
      maxSurge: 25%
      maxUnavailable: 25%
    type: RollingUpdate
  template:
    metadata:
      creationTimestamp: null
    labels:
      app: nginx
      role: userUI
  spec:
    containers:
      - image: nginx:latest
        imagePullPolicy: Always
        name: nginx
        ports:
          - containerPort: 80
            protocol: TCP
        resources: {}
-- INSERT --
```

35, 21

33%



```
File Edit View Terminal Tabs Help
backend-deployment-59d449b99d-h2zjq 0/1 Running 0 9s
backend-deployment-78976f74f5-b8c85 1/1 Running 0 6h40m
backend-deployment-78976f74f5-flfsj 1/1 Running 0 6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME READY UP-TO-DATE AVAILABLE AGE
backend-deployment 3/3 3 3 6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME READY UP-TO-DATE AVAILABLE AGE
backend-deployment 3/3 3 3 6h41m
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl set serviceaccount deploy app-1 app -n frontend
deployment.apps/app-1 serviceaccount updated
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ vim ~/prompt-escargot/buffalo-deployment.yaml
candidate@node-1:~$ vim ~/prompt-escargot/buffalo-deployment.yaml
candidate@node-1:~$ kubectl apply -f ~/prompt-escargot/buffalo-deployment.yaml
deployment.apps/buffalo-deployment configured
candidate@node-1:~$ kubectl get pods -n gorilla
NAME READY STATUS RESTARTS AGE
buffalo-deployment-776844df7f-r5fsb 1/1 Running 0 6h38m
buffalo-deployment-859898c6f5-zx5gj 0/1 ContainerCreating 0 8s
candidate@node-1:~$ kubectl get deploy -n gorilla
NAME READY UP-TO-DATE AVAILABLE AGE
buffalo-deployment 1/1 1 1 6h38m
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl edit deploy ckad00017-deployment -n ckad00017
deployment.apps/ckad00017-deployment edited
candidate@node-1:~$
```

```
File Edit View Terminal Tabs Help
candidate@node-1:~$ kubectl get pods -n gorilla
NAME READY STATUS RESTARTS AGE
buffalo-deployment-776844df7f-r5fsb 1/1 Running 0 6h38m
buffalo-deployment-859898c6f5-zx5gj 0/1 ContainerCreating 0 8s
candidate@node-1:~$ kubectl get deploy -n gorilla
NAME READY UP-TO-DATE AVAILABLE AGE
buffalo-deployment 1/1 1 1 6h38m
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl edit deploy ckad00017-deployment -n ckad00017
deployment.apps/ckad00017-deployment edited
candidate@node-1:~$ kubectl expose deploy ckad00017-deployment -n ckad0001
ckad00014 ckad00015 ckad00017
candidate@node-1:~$ kubectl expose deploy ckad00017-deployment -n ckad0001
ckad00014 ckad00015 ckad00017
candidate@node-1:~$ kubectl expose deploy ckad00017-deployment -n ckad0001
ckad00014 ckad00015 ckad00017
candidate@node-1:~$ kubectl expose deploy ckad00017-deployment -n ckad0001
ckad00014 ckad00015 ckad00017
candidate@node-1:~$ kubectl expose deploy ckad00017-deployment -n ckad0001
ckad00014 ckad00015 ckad00017
candidate@node-1:~$ kubectl expose deploy ckad00017-deployment -n ckad0001
ckad00014 ckad00015 ckad00017
candidate@node-1:~$ kubectl expose deploy ckad00017-deployment -n ckad0001
ckad00014 ckad00015 ckad00017
candidate@node-1:~$ kubectl expose deploy ckad00017-deployment -n ckad0001
ckad00014 ckad00015 ckad00017
candidate@node-1:~$ kubectl expose deploy ckad00017-deployment -n ckad0001
ckad00014 ckad00015 ckad00017
candidate@node-1:~$ kubectl expose deploy ckad00017-deployment -n ckad0001
ckad00014 ckad00015 ckad00017
candidate@node-1:~$ kubectl expose service/cherry --name=cherry --port=8888 --type=NodePort
service/cherry exposed
candidate@node-1:~$
```

```
candidate@node-1:~$ kubectl get svc
NAME TYPE CLUSTER-IP EXTERNAL-IP PORT(S) AGE
kubernetes ClusterIP 10.96.0.1 <none> 443/TCP 77d
candidate@node-1:~$ kubectl get svc -n ckad00017
NAME TYPE CLUSTER-IP EXTERNAL-IP PORT(S) AGE
cherry NodePort 10.100.100.176 <none> 8888:30683/TCP 24s
candidate@node-1:~$ kubectl expose service deploy ckad00017-deployment -n ckad00017 --name=cherry --port=8888 --type=NodePort
Error from server (NotFound): services "deploy" not found
Error from server (NotFound): services "ckad00017-deployment" not found
candidate@node-1:~$ kubectl get svc -n ckad00017
NAME TYPE CLUSTER-IP EXTERNAL-IP PORT(S) AGE
cherry NodePort 10.100.100.176 <none> 8888:30683/TCP 45s
candidate@node-1:~$
```



```
File Edit View Terminal Tabs Help
candidate@node-1:~$ kubectl expose service deploy ckad00017-deployment -n ckad00017 --name=cherry --port=8888 --type=NodePort
Error from server (NotFound): services "deploy" not found
Error from server (NotFound): services "ckad00017-deployment" not found
candidate@node-1:~$ kubectl get svc -n ckad00017
NAME      TYPE      CLUSTER-IP      EXTERNAL-IP      PORT(S)          AGE
cherry    NodePort  10.100.100.176  <none>           8888:30683/TCP  46s
candidate@node-1:~$ history
 1 vi ~/spicy-pikachu/backend-deployment.yaml
 2 kubectl config use-context k8s
 3 vim .vimrc
 4 vim ~/spicy-pikachu/backend-deployment.yaml
 5 kubectl apply -f ~/spicy-pikachu/backend-deployment.yaml
 6 kubectl get pods -n staging
 7 kubectl get deploy -n staging
 8 vim ~/spicy-pikachu/backend-deployment.yaml
 9 kubectl config use-context k8s
10 kubectl set serviceaccount deploy app-1 app -n frontend
11 kubectl config use-context k8s
12 vim ~/prompt-escargot/buffalo-deployment.yaml
13 kubectl apply -f ~/prompt-escargot/buffalo-deployment.yaml
14 kubectl get pods -n gorilla
15 kubectl get deploy -n gorilla
16 kubectl config use-context k8s
17 kubectl edit deploy ckad00017-deployment -n ckad00017
18 kubectl expose deploy ckad00017-deployment -n ckad00017 --name=cherry --port=8888 --type=NodePort
19 kubectl get svc
20 kubectl get svc -n ckad00017
21 kubectl expose service deploy ckad00017-deployment -n ckad00017 --name=cherry --port=8888 --type=NodePort
22 kubectl get svc -n ckad00017
23 history
candidate@node-1:~$
```

QUESTION 5

CORRECT TEXT



Context

A container within the poller pod is hard-coded to connect the nginxsvc service on port 90 . As this port changes to 5050 an additional container needs to be added to the poller pod which adapts the container to connect to this new port. This should be realized as an ambassador container within the pod.

Task



Update the nginxsvc service to serve on port 5050. Add an HAProxy container named haproxy bound to port 90 to the poller pod and deploy the enhanced pod. Use the image haproxy and inject the configuration located at /opt/KDMC00101/haproxy.cfg, with a ConfigMap named haproxyconfig, mounted into the container so that haproxy.cfg is available at /usr/local/etc/haproxy/haproxy.cfg. Ensure that you update the args of the poller container to connect to localhost instead of nginxsvc so that the connection is correctly proxied to the new service endpoint. You must not modify the port of the endpoint in poller's args. The spec file used to create the initial poller pod is available in /opt/KDMC00101/poller.yaml

A. Please check explanations

B. Place Holder

Correct Answer: A

apiVersion: apps/v1

kind: Deployment

metadata:

name: my-nginx

spec:

selector:

matchLabels:

run: my-nginx

replicas: 2

template:

metadata:

labels:

run: my-nginx

spec:

containers:

-name: my-nginx image: nginx ports:

-containerPort: 90 This makes it accessible from any node in your cluster. Check the nodes the Pod is running on:

kubectl apply -f ./run-my-nginx.yaml kubectl get pods -l run=my-nginx -o wide NAME READY STATUS RESTARTS

AGE IP NODE my-nginx-3800858182-jr4a2 1/1 Running 0 13s 10.244.3.4 kubernetes-minion-905m my-

nginx-3800858182-kna2y 1/1 Running 0 13s 10.244.2.5 kubernetes-minion-ljyd Check your pods' IPs: kubectl get pods

-l run=my-nginx -o yaml | grep podIP podIP: 10.244.3.4 podIP: 10.244.2.5

[CKAD Practice Test](#)

[CKAD Exam Questions](#)

[CKAD Braindumps](#)