



# MCD-LEVEL1-DELTA<sup>Q&As</sup>

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA





## Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/mcd-level1-delta.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft  
Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

Refer to the exhibits.

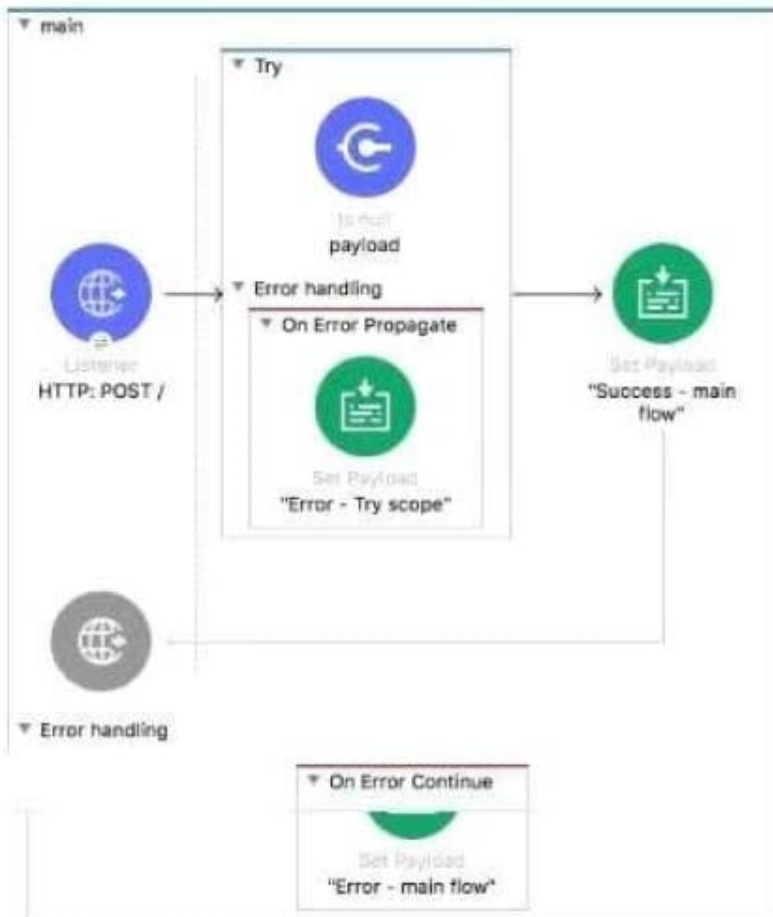

```
<flow name="main">
  <http:listener doc:name="HTTP: POST /" config-ref="HTTP_Listener_config" path="/" />
  <try doc:name="Try" >
    <validation:is-null doc:name="payload" value="#[payload]" message="Validation Error"/>
    <error-handler >
      <on-error-propagate enableNotifications="true" logException="true" doc:name="On Error Propagate">
        <set-payload value="Error - Try scope" doc:name="Error - Try scope"/>
      </on-error-propagate>
    </error-handler>
  </try>
  <set-payload value="Success - main flow" doc:name="Success - main flow" />
  <error-handler >
    <on-error-continue enableNotifications="true" logException="true" doc:name="On Error Continue" >
      <set-payload value="Error - main flow" doc:name="Error - main flow" />
    </on-error-continue>
  </error-handler>
</flow>
```

The Validation component in the Try scope throws an error. What response message is returned to a client request to the main flow's HTTP Listener? The Validation component in the Try scope throws an error. What response message is returned to a client request to the main flow's HTTP Listener?



- A. Success - main flow
- B. Error - main flow
- C. Error - Try scope
- D. Validation Error


Correct Answer: B

### QUESTION 2

Refer to the exhibits.

```
#%RAML 1.0
title: ACME Order API
version: 1.0
```

```
/order:
  post:
    body:
      application/xml:
        example: |
          <order oid="1001">
            <customerName>Annie Point
            </customerName>
            <itemName>Electric Standing Desk
            </itemName>
            <cost>300.00</cost>
          </order>
```

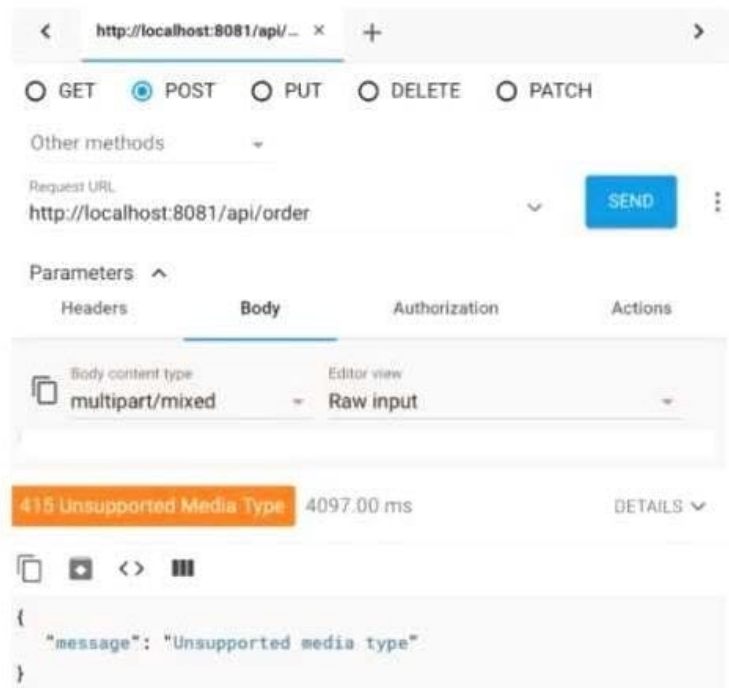

The web client sends a POST request to the ACME Order API with an XML payload. An error is returned. What should be changed in the request so that a success response code is returned to the web client?

- A. Set a request header with the name Content-Type to a value of `application/octet-stream`
- B. Set a request header with the name Content-Type to a value of `application/xml`
- C. Set a response header with the name Content-Type to a value of `application/xml`
- D. Set a response header with the name Content-Type to a value of `application/octet-stream`

Correct Answer: B

### QUESTION 3




An app team is developing a mobile banking app. It took them two months to create their own APIs to access transaction information from a central database. The app team later found out that another team had already built an API that accesses the transaction information they need. According to MuleSoft, what organization structure could have saved the app team two months of development time?

- A. Center of Excellence
- B. Center for Enablement
- C. MuleSoft Support Center
- D. Central API Review Board

Correct Answer: B

#### QUESTION 4

Refer to the exhibits.

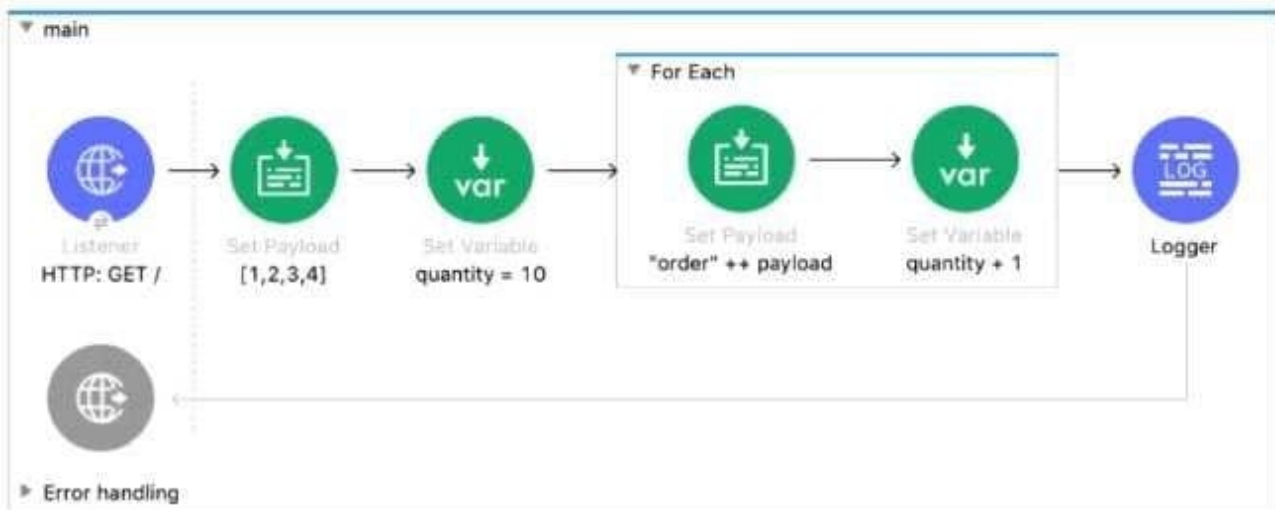

```
<flow name="main" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_listener_config" path="/" allowedMethods="GET"/>
  <set-payload value="#[[1,2,3,4]]" doc:name="[1,2,3,4]" />
  <set-variable value='10' doc:name="quantity = 10" variableName="quantity" />
  <foreach doc:name="For Each" >
    <set-payload value='#["order" ++ payload]' doc:name="'order" ++ payload' />
    <set-variable value="#[vars.quantity + 1]" doc:name="quantity + 1" variableName="quantity" />
  </foreach>
  <logger level="INFO" doc:name="Logger" message='#[[ payload, vars.quantity ]]' />
</flow>
```

What payload and quantity are logged at the end of the main flow?

- A. [[order1, order2, order3, order4], 14]
- B. [[1,2,3,4], 10]
- C. [[1,2,3,4], 14]



D. [orderlorder2order3order4, 14]

Correct Answer: C

---

#### QUESTION 5

What DataWeave 2.0 type can be used as input to a mapObject operation?

- A. Array
- B. Object
- C. String
- D. Map

Correct Answer: B

[MCD-LEVEL1-DELTA  
Practice Test](#)

[MCD-LEVEL1-DELTA Exam  
Questions](#)

[MCD-LEVEL1-DELTA  
Braindumps](#)