



MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Refer to the exhibits.

The screenshot shows the MuleSoft configuration interface for an HTTP Request. The 'Basic Settings' section has 'Name: HTTP_Request_config'. The 'URL Configuration' section has 'Base path: /'. The 'Connection' section has 'Configuration' with 'Protocol: HTTP (Default)', 'Host: mu.learn.mulesoft.com', and 'Port: 80'. To the right, a 'config.yaml' file is open, showing the following content:

```
1 training:  
2   host: "mu.learn.mulesoft.com"  
3   port: "80"  
4   basepath: "/"  
5   protocol: "HTTP"
```

A Mule application has an HTTP Request that is configured with hardcoded values. To change this, the Mule application is configured to use a properties file named config.yaml. what valid expression can the HTTP Request host value be set to so that it is no longer hardcoded?

- A. \${training.host}
- B. \${training:host}
- C. #[training:host]
- D. #[training.host]

Correct Answer: A

QUESTION 2

What is the correct syntax to reference a fragment in RAML?

- A. examples: #include examples/BankAccountsExample.raml
- B. examples: \$include examples/BankAccountsExample.raml
- C. examples: ?include examples/BankAccountsExample.raml
- D. examples: !include examples/BankAccountsExample.raml

Correct Answer: D



QUESTION 3

Refer to the exhibit.



The main flow contains a Flow Reference for the child flow. What values are accessible in the child flow after a web client submits a request to `http://localhost:8081/order?color=red`?



- A. payload
- B. payload quantity var
- C. payload color query param
- D. payload quantity var color query param

Correct Answer: D

QUESTION 4

Refer to the exhibits. The Set Payload transformer in the addItem child flow uses DataWeave to create an order object.

What is the correct DataWeave code for the Set Payload transformer in the createOrder flow to use the addItem child flow to add a router call with the price of 100 to the order?

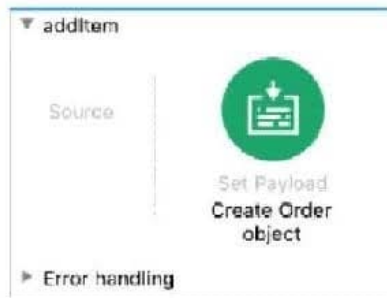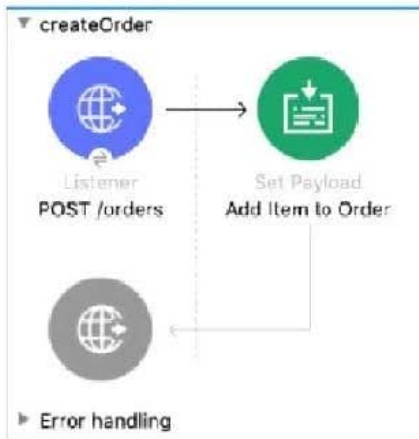

```
1 @%dw 2.0
2 output application/json
3 ---
4 order: {
5   item: {
6     itemName: payload.item,
7     itemType: payload.itemType
8     price: payload.price
9   }
10 }
```

- A. `lookup("addItem", { price: "100", item: "router", itemType: "cable" })`
- B. `addItem({ payload: { price: "100", item: "router", itemType: "cable" } > })`
- C. `lookup("addItem", { payload: { price: "100", item: "router", itemType: "cable" } > })`
- D. `addItem({ price: "100", item: "router", itemType: "cable" })`

Correct Answer: C

QUESTION 5

Refer to the exhibit.



```
#!/RAML 1.0
title: ACME Airlines
version: 1.0
```

```
/flights:
  get:
    responses:
      200:
      404:
  /airline:
    get:
      queryParameters:
        code: string
      responses:
        200:
        404:
```

```
/accounts:
  get:
    responses:
      200:
      404:
  post:
    responses:
      201:
```

How many private flows does APIKIT generate from the RAML specification?

- A. 1
- B. 2
- C. 3
- D. 4

Correct Answer: D

[MCD-LEVEL1-DELTA PDF Dumps](#)

[MCD-LEVEL1-DELTA VCE Dumps](#)

[MCD-LEVEL1-DELTA Practice Test](#)