



MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA





Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

What is the object type returned by the File List operation?

- A. Object of String file names
- B. Array of String file names
- C. Object of Mule event objects
- D. Array of Mule event objects

Correct Answer: D

QUESTION 2

What is NOT part of a Mule 4 event?

- A. attributes
- B. payload
- C. inboundProperties
- D. message

Correct Answer: C

QUESTION 3

What are the features of CloudHub Fabric?

- A. Non-persistent queue
- B. Horizontal Scaling
- C. VPN Mock Services
- D. None of these

Correct Answer: B


QUESTION 4

Refer to the exhibits.



```
##RAML 1.0
title: ACME Order API
version: 1.0
```

```
/order:
  post:
    body:
      application/xml:
        example: |
          <order oid="1001">
            <customerName>Annie Point
            </customerName>
            <itemName>Electric Standing Desk
            </itemName>
            <cost>300.00</cost>
          </order>
```

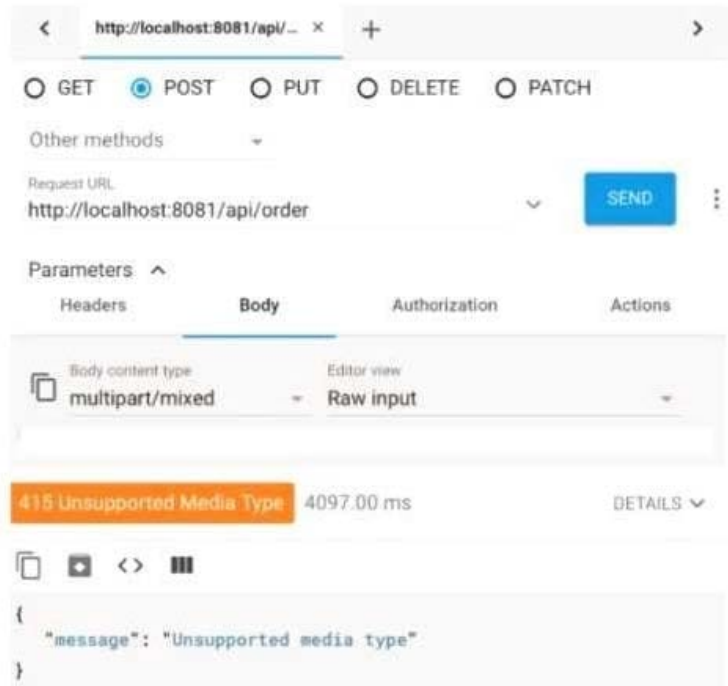

The web client sends a POST request to the ACME Order API with an XML payload. An error is returned. What should be changed in the request so that a success response code is returned to the web client?

- A. Set a request header with the name Content-Type to a value of `application/octet-stream`
- B. Set a request header with the name Content-Type to a value of `application/xml`
- C. Set a response header with the name Content-Type to a value of `application/xml`
- D. Set a response header with the name Content-Type to a value of `application/octet-stream`

Correct Answer: B

QUESTION 5

What is the trait name you would use for specifying client credentials in RAML?

- A. headers
- B. client-id
- C. client-id-required
- D. we do not specify in RAML

Correct Answer: C