

NSE4_FGT-7.0^{Q&As}

Fortinet NSE 4 - FortiOS 7.0

Pass Fortinet NSE4_FGT-7.0 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.geekcert.com/nse4_fgt-7-0.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Fortinet Official Exam Center

Instant Download After Purchase

- 100% Money Back Guarantee
- 😳 365 Days Free Update
- 800,000+ Satisfied Customers





QUESTION 1

Which statement correctly describes NetAPI polling mode for the FSSO collector agent?


- A. The collector agent uses a Windows API to query DCs for user logins.
- B. NetAPI polling can increase bandwidth usage in large networks.
- C. The collector agent must search security event logs.
- D. The NetSession Enum function is used to track user logouts.

Correct Answer: D

Reference: https://kb.fortinet.com/kb/documentLink.do?externalID=FD34906 https://kb.fortinet.com/kb/microsites/search.do?cmd=displayKCanddocType=kcandexternalId=F D34906andsliceId=1anddocTypeID=DT_KCARTICLE_1_1anddialogID=210966035andstateId=1%2 00% 20210968009%27

QUESTION 2

Refer to the exhibit.

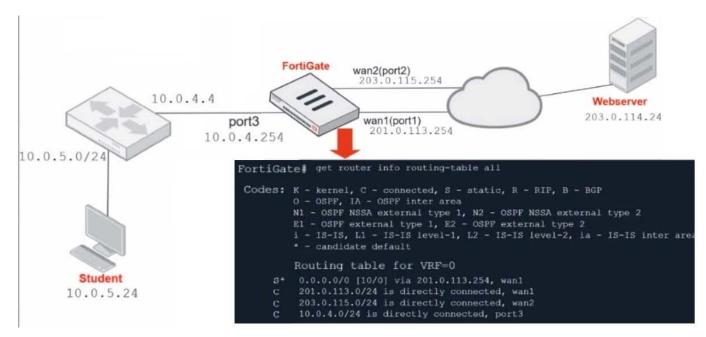

Which contains a network diagram and routing table output.

The Student is unable to access Webserver.

What is the cause of the problem and what is the solution for the problem?

A. The first packet sent from Student failed the RPF check. This issue can be resolved by adding a static route to 10.0.4.0/24 through wan1.



B. The first reply packet for Student failed the RPF check. This issue can be resolved by adding a static route to 10.0.4.0/24 through wan1.

C. The first reply packet for Student failed the RPF check. This issue can be resolved by adding a static route to 203.0.114.24/32 through port3.

D. The first packet sent from Student failed the RPF check. This issue can be resolved by adding a static route to 203.0.114.24/32 through port3.

Correct Answer: D

QUESTION 3

Refer to the exhibit to view the application control profile.

-		Conserved a		@ FIP		Network.Service		-		- oronogeneously
 Web.Client (24) Unkrown 		Unknown Application	S FTP_Comm	nand	Network,Service		Apple_iPad		Mobile	
Network	k Protocol Enforcement			C FaceTime	G FaceTime			g Apple.iPhone		Mobile
	100 B 111			Facebook	Facebook_File.Download 🛆 🔒		Social.Media			Network.Servic
Application and Filter Overrides				Facebook	Facebook_File.Upload		Social.Media		e	VolP
+ Create New / Edit 🖹 Delete				G Facebook	 Facebook_Messenger.Image.Transfer 		N	T FileMaker		General.Interes
Priority Details		Type	Action	G Facebook			13	FileMaker_Web.Publishing A		General.Interest
1	Excessive-Bandwidth	Filter	Ø Block	 Facebook, 	Facebook, Messenger.VolP.Call Facebook, Messenger.Voice.Message		Collaboration		OWSER_Safari	Web.Client
2	VIND Apple	Filter	 Monitor 	 Facebook 					ne	Video/Audio
			Facebook	Facebook_Video.Play		Video/Audio			Storage.Backup	
				Name \$	Category \$	Techno	logy	÷	Popularity ≑	
	Application Ca	tego	ny 🗈 Ap	plication Signature 📵	Chinese Provide	- Come	10.51		i oponirity +	
	E Facel			FaceTime	e VolP		Client-Server			

Based on the configuration, what will happen to Apple FaceTime?

A. Apple FaceTime will be blocked, based on the Excessive-Bandwidth filter configuration

B. Apple FaceTime will be allowed, based on the Apple filter configuration.

C. Apple FaceTime will be allowed only if the filter in Application and Filter Overrides is set to Learn

D. Apple FaceTime will be allowed, based on the Categories configuration.

Correct Answer: A

QUESTION 4

Which statements best describe auto discovery VPN (ADVPN). (Choose two.)

A. It requires the use of dynamic routing protocols so that spokes can learn the routes to other spokes.

B. ADVPN is only supported with IKEv2.

C. Tunnels are negotiated dynamically between spokes.

D. Every spoke requires a static tunnel to be configured to other spokes so that phase 1 and phase 2 proposals are defined in advance.



Correct Answer: AC

QUESTION 5

You have enabled logging on your FortiGate device for Event logs and all Security logs, and you have set up logging to use the FortiGate local disk.

What is the default behavior when the local disk is full?

- A. Logs are overwritten and the only warning is issued when log disk usage reaches the threshold of 95%.
- B. No new log is recorded until you manually clear logs from the local disk.
- C. Logs are overwritten and the first warning is issued when log disk usage reaches the threshold of 75%.
- D. No new log is recorded after the warning is issued when log disk usage reaches the threshold of 95%.

Correct Answer: C

Reference: https://docs.fortinet.com/document/fortigate/6.4.0/cli-reference/462620/log-disk-setting

Latest NSE4_FGT-7.0NSE4_FGT-7.0 PDF DumpsNSE4_FGT-7.0 BraindumpsDumps